


FD3510 (35x35x10mm)


Product Image



Dimension Drawing

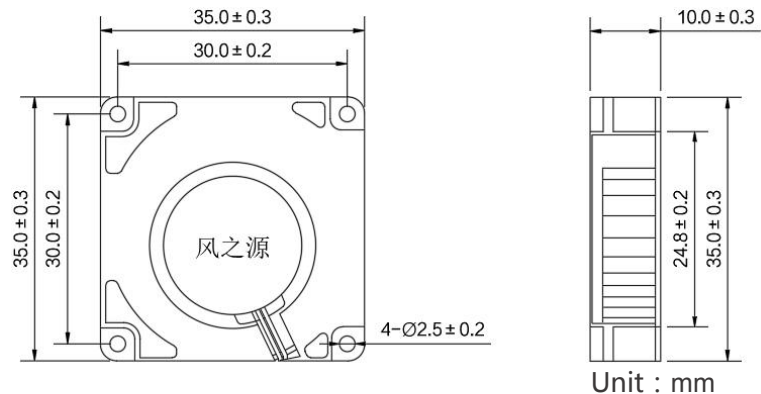

Performance Curve

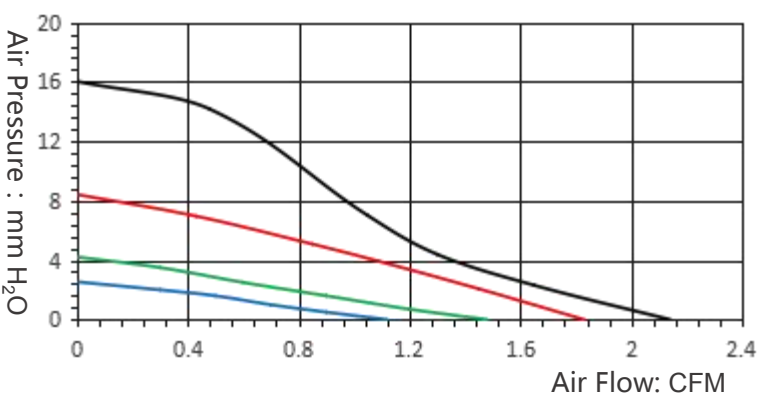

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG28 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD3510S2U-BP00	12	6~14	11000	0.20	2.40	2.14	3.64	16.03	0.63	41.8	Black	10
FD3510S2H-BP00			9000	0.12	1.44	1.83	3.11	8.42	0.33	35.3	Red	
FD3510S2M-BP00			7000	0.08	0.96	1.48	2.51	4.21	0.17	28.6	Green	
FD3510S2L-BP00			5000	0.04	0.48	1.12	1.90	2.54	0.10	22.4	Blue	
FD3510S1U-BP00	5	3.5~5.5	11000	0.25	1.25	2.14	3.64	16.03	0.63	41.8	Black	
FD3510S1H-BP00			9000	0.15	0.75	1.83	3.11	8.42	0.33	35.3	Red	
FD3510S1M-BP00			7000	0.10	0.50	1.48	2.51	4.21	0.17	28.6	Green	
FD3510S1L-BP00			5000	0.07	0.35	1.12	1.90	2.54	0.10	22.4	Blue	

Operation direction: Clockwise as observed from the label.
Air supply direction: Side of label.
※ The above specifications are for reference and the final specifications are subject to change.