


FD4010 (40x40x10mm)


Product Image



Dimension Drawing

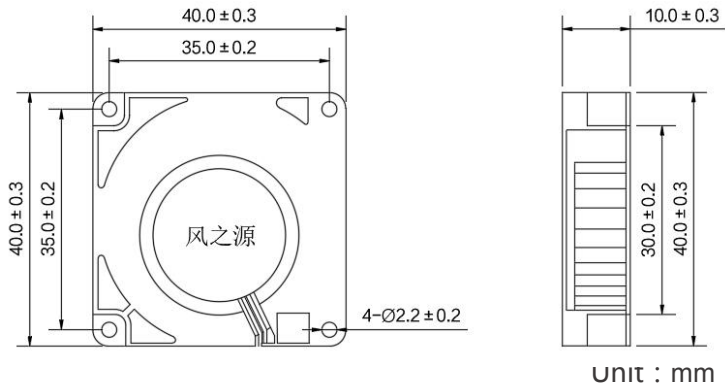

Performance Curve

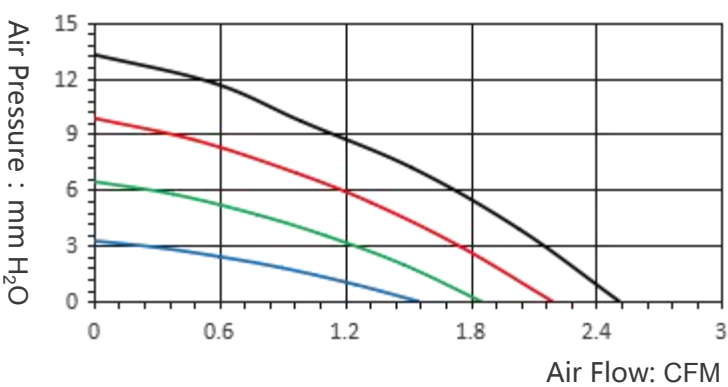

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m ³ /h	mm H ₂ O	In H ₂ O	dBA	Color	g
FD4010B4U-BP00	24	12~26.4	8000	0.12	2.88	2.51	4.26	13.27	0.52	35.2	Black	11
FD4010B4H-BP00			7000	0.06	1.44	2.19	3.72	9.85	0.39	30.4	Red	
FD4010B4M-BP00			6000	0.04	0.96	1.85	3.14	6.44	0.25	26.6	Green	
FD4010B4L-BP00			5000	0.02	0.48	1.55	2.63	3.25	0.13	22.7	Blue	
FD4010B2U-BP00	12	6~14	8000	0.15	1.80	2.51	4.26	13.27	0.52	35.2	Black	
FD4010B2H-BP00			7000	0.08	0.96	2.19	3.72	9.85	0.39	30.4	Red	
FD4010B2M-BP00			6000	0.06	0.72	1.85	3.14	6.44	0.25	26.6	Green	
FD4010B2L-BP00			5000	0.04	0.48	1.55	2.63	3.25	0.13	22.7	Blue	
FD4010B1U-BP00	5	3.5~5.5	8000	0.24	1.20	2.51	4.26	13.27	0.52	35.2	Black	
FD4010B1H-BP00			7000	0.18	0.90	2.19	3.72	9.85	0.39	30.4	Red	
FD4010B1M-BP00			6000	0.12	0.60	1.85	3.14	6.44	0.25	26.6	Green	
FD4010B1L-BP00			5000	0.08	0.40	1.55	2.63	3.25	0.13	22.7	Blue	