


FD4015A (40x40x15mm)

Product Image



Dimension Drawing

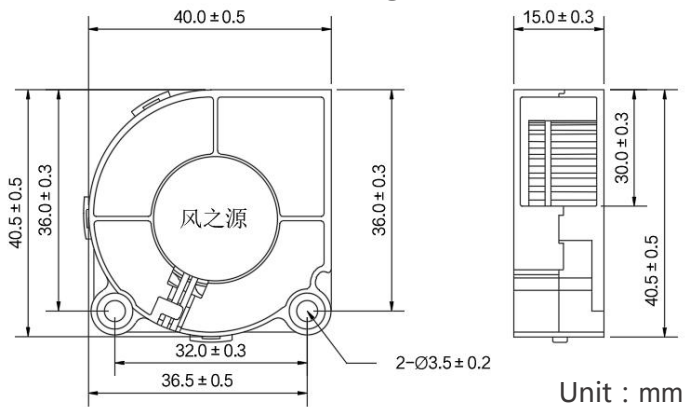

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

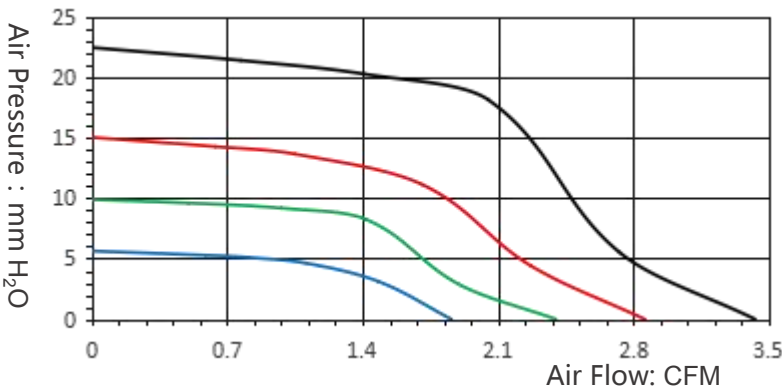

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD4015B4U-BP00	24	12~26.4	10000	0.18	4.32	3.53	6.00	20.63	0.81	48.8	●	20
FD4015B4H-BP00			8500	0.10	2.40	3.02	5.13	14.56	0.57	42.8	●	
FD4015B4M-BP00			7000	0.05	1.20	2.38	4.04	7.92	0.31	37.1	●	
FD4015B4L-BP00			5500	0.03	0.72	1.86	3.16	4.71	0.19	31.7	●	
FD4015B2U-BP00	12	6~14	10000	0.25	3.00	3.53	6.00	20.63	0.81	48.8	●	
FD4015B2H-BP00			8500	0.12	1.44	3.02	5.13	14.56	0.57	42.8	●	
FD4015B2M-BP00			7000	0.08	0.96	2.38	4.04	7.92	0.31	37.1	●	
FD4015B2L-BP00			5500	0.06	0.72	1.86	3.16	4.71	0.19	31.7	●	
FD4015B1U-BP00	5	3.5~5.5	10000	0.40	2.00	3.53	6.00	20.63	0.81	48.8	●	
FD4015B1H-BP00			8500	0.30	1.50	3.02	5.13	14.56	0.57	42.8	●	
FD4015B1M-BP00			7000	0.20	1.00	2.38	4.04	7.92	0.31	37.1	●	
FD4015B1L-BP00			5500	0.10	0.50	1.86	3.16	4.71	0.19	31.7	●	