


FD5015 (50x50x15mm)

Product Image



Dimension Drawing

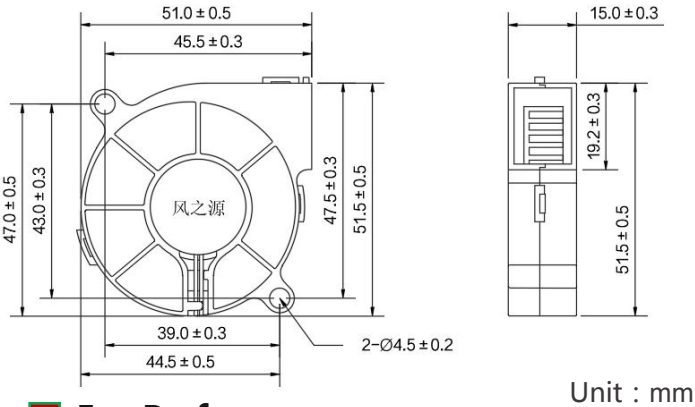

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

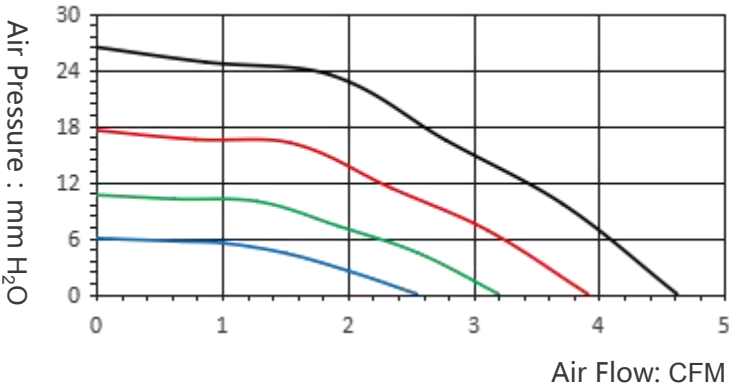

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD5015B4U-BP00	24	12~26.4	7500	0.15	3.60	4.62	7.85	26.39	1.04	50.6	●	26
FD5015B4H-BP00			6000	0.08	1.92	3.91	6.64	17.49	0.69	45.7	●	
FD5015B4M-BP00			5000	0.06	1.44	3.20	5.44	10.59	0.42	40.2	●	
FD5015B4L-BP00			4000	0.04	0.96	2.55	4.33	5.95	0.23	34.3	●	
FD5015B2U-BP00	12	6~14	7500	0.25	3.00	4.62	7.85	26.39	1.04	50.6	●	
FD5015B2H-BP00			6000	0.14	1.68	3.91	6.64	17.49	0.69	45.7	●	
FD5015B2M-BP00			5000	0.08	0.96	3.20	5.44	10.59	0.42	40.2	●	
FD5015B2L-BP00			4000	0.05	0.60	2.55	4.33	5.95	0.23	34.3	●	
FD5015B1U-BP00	5	3.5~5.5	7500	0.35	1.75	4.62	7.85	26.39	1.04	50.6	●	
FD5015B1H-BP00			6000	0.25	1.25	3.91	6.64	17.49	0.69	45.7	●	
FD5015B1M-BP00			5000	0.20	1.00	3.20	5.44	10.59	0.42	40.2	●	
FD5015B1L-BP00			4000	0.10	0.50	2.55	4.33	5.95	0.23	34.3	●	