


FD6018 (60x60x18mm)

Product Image



Dimension Drawing

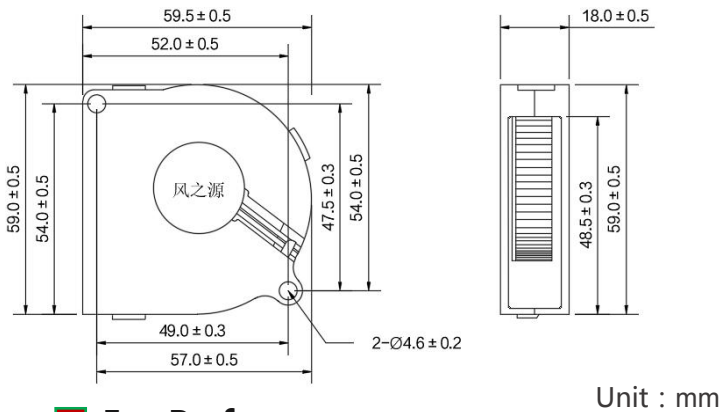

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

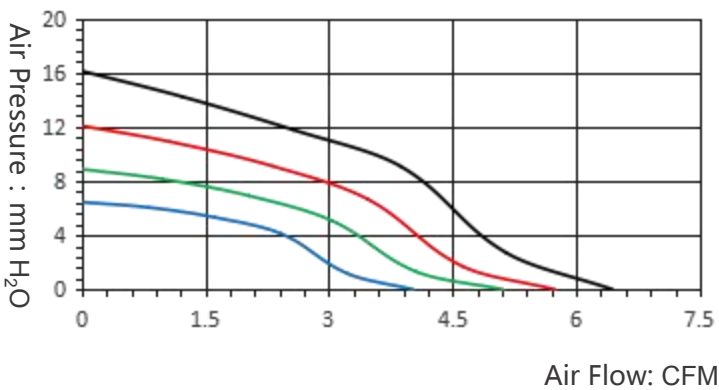

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6018S4U-BP00	24	12~26.4	5000	0.12	2.88	6.39	10.86	16.02	0.63	41.1	●	32
FD6018S4H-BP00			4500	0.08	1.92	5.74	9.75	12.07	0.48	37.2	●	
FD6018S4M-BP00			4000	0.05	1.20	5.03	8.55	8.72	0.34	33.4	●	
FD6018S4L-BP00			3500	0.03	0.72	4.09	6.95	6.54	0.26	28.8	●	
FD6018S2U-BP00	12	6~14	5000	0.20	2.40	6.39	10.86	16.02	0.63	41.1	●	
FD6018S2H-BP00			4500	0.12	1.44	5.74	9.75	12.07	0.48	37.2	●	
FD6018S2M-BP00			4000	0.09	1.08	5.03	8.55	8.72	0.34	33.4	●	
FD6018S2L-BP00			3500	0.06	0.72	4.09	6.95	6.54	0.26	28.8	●	
FD6018S1U-BP00	5	3.5~5.5	5000	0.30	1.50	6.39	10.86	16.02	0.63	41.1	●	
FD6018S1H-BP00			4500	0.20	1.00	5.74	9.75	12.07	0.48	37.2	●	
FD6018S1M-BP00			4000	0.16	0.80	5.03	8.55	8.72	0.34	33.4	●	
FD6018S1L-BP00			3500	0.10	0.50	4.09	6.95	6.54	0.26	28.8	●	