


FD6020 (60x60x20mm)

Product Image



Dimension Drawing

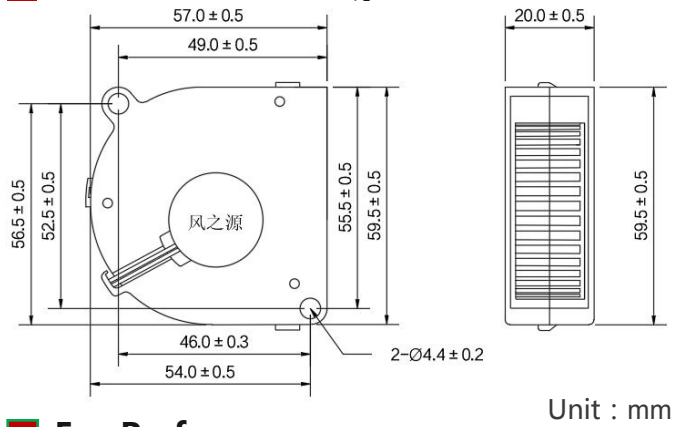

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

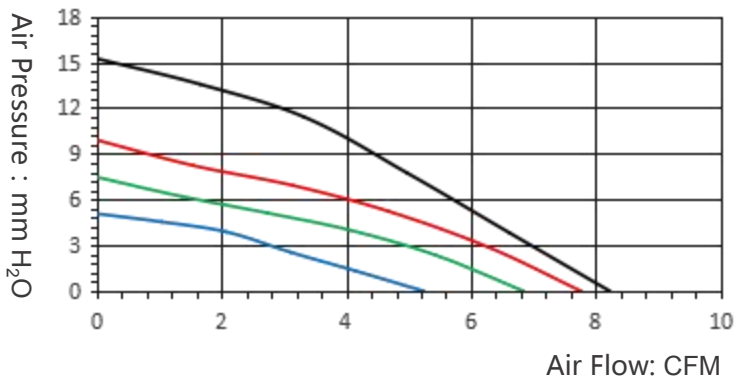

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6020B4U-BP00	24	12~26.4	4500	0.10	2.40	8.23	13.98	15.23	0.60	38.6	Black	35
FD6020B4H-BP00			4000	0.07	1.68	7.77	13.20	9.90	0.39	34.2	Red	
FD6020B4M-BP00			3500	0.05	1.20	6.85	11.64	7.47	0.29	30.3	Green	
FD6020B4L-BP00			3000	0.03	0.72	5.25	8.92	5.07	0.20	27.4	Blue	
FD6020B2U-BP00	12	6~14	4500	0.18	2.16	8.23	13.98	15.23	0.60	38.6	Black	
FD6020B2H-BP00			4000	0.14	1.68	7.77	13.20	9.90	0.39	34.2	Red	
FD6020B2M-BP00			3500	0.08	0.96	6.85	11.64	7.47	0.29	30.3	Green	
FD6020B2L-BP00			3000	0.06	0.72	5.25	8.92	5.07	0.20	27.4	Blue	
FD6020B1U-BP00	5	3.5~5.5	4500	0.45	2.25	8.23	13.98	15.23	0.60	38.6	Black	
FD6020B1H-BP00			4000	0.35	1.75	7.77	13.20	9.90	0.39	34.2	Red	
FD6020B1M-BP00			3500	0.25	1.25	6.85	11.64	7.47	0.29	30.3	Green	
FD6020B1L-BP00			3000	0.20	1.00	5.25	8.92	5.07	0.20	27.4	Blue	