


FD6025 (60x60x25mm)

Product Image



Dimension Drawing

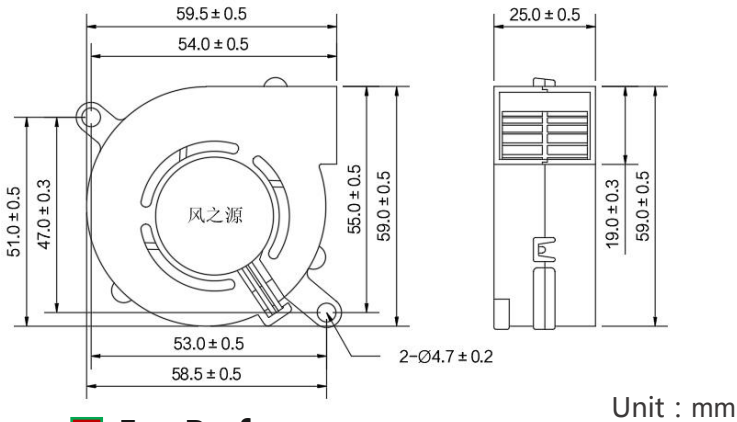

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
 -20°C~+75°C (Hydraulic)


Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
 40°C 30, 000 hours (Hydraulic)

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6025B4U-BP00	24	12~26.4	6000	0.25	6.00	12.31	20.91	37.37	1.47	52.3		51
FD6025B4H-BP00			5000	0.12	2.88	10.21	17.35	23.70	0.93	47.6		
FD6025B4M-BP00			4000	0.06	1.44	8.10	13.76	13.50	0.53	42.4		
FD6025B4L-BP00			3000	0.03	0.72	5.88	9.99	6.17	0.24	36.2		
FD6025B2U-BP00	12	6~14	6000	0.30	3.60	12.31	20.91	37.37	1.47	52.3		
FD6025B2H-BP00			5000	0.25	3.00	10.21	17.35	23.70	0.93	47.6		
FD6025B2M-BP00			4000	0.15	1.80	8.10	13.76	13.50	0.53	42.4		
FD6025B2L-BP00			3000	0.08	0.96	5.88	9.99	6.17	0.24	36.2		
FD6025B1U-BP00	5	3.5~5.5	6000	0.50	2.50	12.31	20.91	37.37	1.47	52.3		
FD6025B1H-BP00			5000	0.35	1.75	10.21	17.35	23.70	0.93	47.6		
FD6025B1M-BP00			4000	0.25	1.25	8.10	13.76	13.50	0.53	42.4		
FD6025B1L-BP00			3000	0.15	0.75	5.88	9.99	6.17	0.24	36.2		

Performance Curve

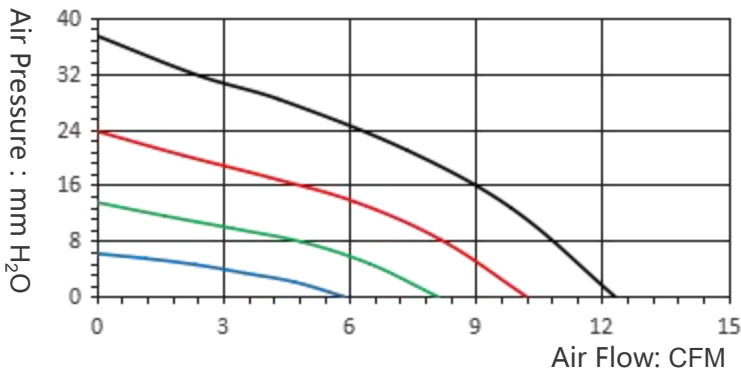

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Imperller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipmentand so on.