


FD6028 (60x60x28mm)

Product Image



Dimension Drawing

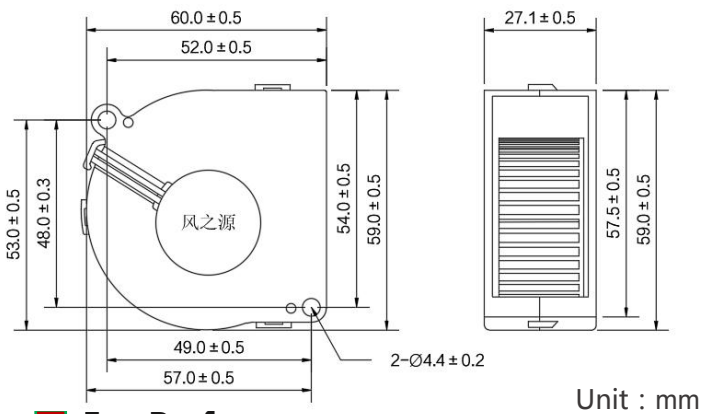

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

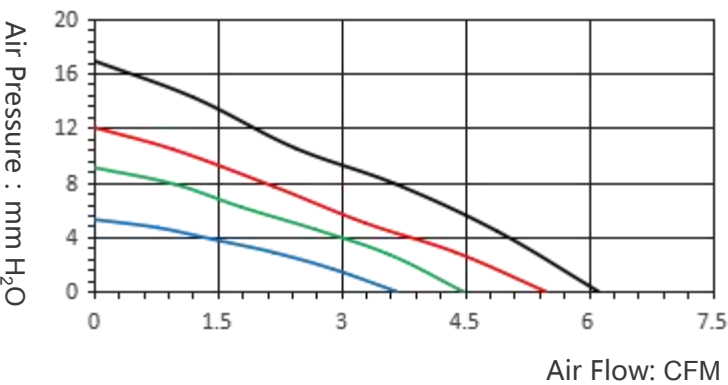

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m ³ /h	mm H ₂ O	In H ₂ O	dBA	Color	g
FD6028B4U-BP00	24	12~26.4	4500	0.10	2.40	8.91	15.14	13.99	0.55	40.8	Black	43
FD6028B4H-BP00			4000	0.07	1.68	7.84	13.32	10.15	0.40	35.1	Red	
FD6028B4M-BP00			3500	0.05	1.20	6.76	11.49	7.43	0.29	31.7	Green	
FD6028B4L-BP00			3000	0.03	0.72	5.72	9.72	4.96	0.20	29.2	Blue	
FD6028B2U-BP00	12	6~14	4500	0.21	2.52	8.91	15.14	13.99	0.55	40.8	Black	
FD6028B2H-BP00			4000	0.18	2.16	7.84	13.32	10.15	0.40	35.1	Red	
FD6028B2M-BP00			3500	0.10	1.20	6.76	11.49	7.43	0.29	31.7	Green	
FD6028B2L-BP00			3000	0.08	0.96	5.72	9.72	4.96	0.20	29.2	Blue	
FD6028B1U-BP00	5	3.5~5.5	4500	0.40	2.00	8.91	15.14	13.99	0.55	40.8	Black	
FD6028B1H-BP00			4000	0.32	1.60	7.84	13.32	10.15	0.40	35.1	Red	
FD6028B1M-BP00			3500	0.25	1.25	6.76	11.49	7.43	0.29	31.7	Green	
FD6028B1L-BP00			3000	0.15	0.75	5.72	9.72	4.96	0.20	29.2	Blue	