


FD6510 (65x65x10mm)

Product Image



Dimension Drawing

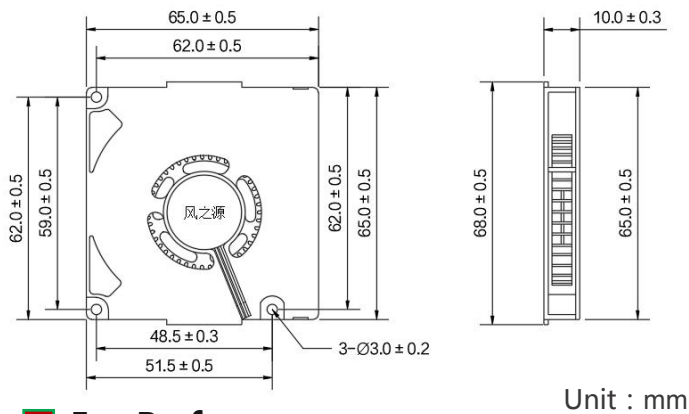

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

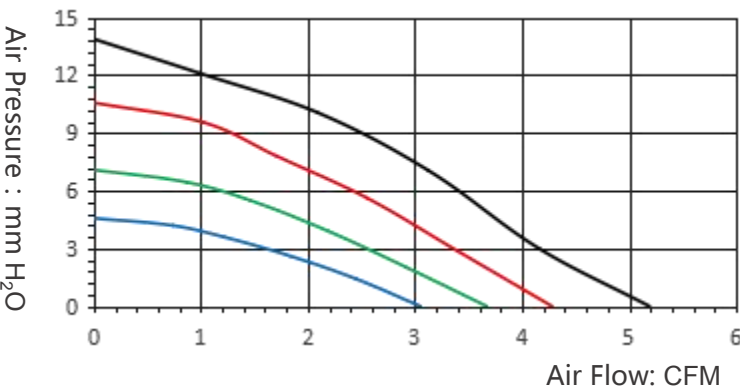

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6510B4U-BP00	24	12~26.4	4000	0.18	4.32	5.19	8.82	13.88	0.55	40.3	Black	26
FD6510B4H-BP00			3500	0.10	2.40	4.28	7.27	10.57	0.42	36.1	Red	
FD6510B4M-BP00			3000	0.07	1.68	3.67	6.24	7.08	0.28	31.7	Green	
FD6510B4L-BP00			2500	0.04	0.96	3.05	5.18	4.57	0.18	27.5	Blue	
FD6510B2U-BP00	12	6~14	4000	0.24	2.88	5.19	8.82	13.88	0.55	40.3	Black	
FD6510B2H-BP00			3500	0.15	1.80	4.28	7.27	10.57	0.42	36.1	Red	
FD6510B2M-BP00			3000	0.10	1.20	3.67	6.24	7.08	0.28	31.7	Green	
FD6510B2L-BP00			2500	0.06	0.72	3.05	5.18	4.57	0.18	27.5	Blue	
FD6510B1U-BP00	5	3.5~5.5	4000	0.35	1.75	5.19	8.82	13.88	0.55	40.3	Black	
FD6510B1H-BP00			3500	0.25	1.25	4.28	7.27	10.57	0.42	36.1	Red	
FD6510B1M-BP00			3000	0.18	0.90	3.67	6.24	7.08	0.28	31.7	Green	
FD6510B1L-BP00			2500	0.12	0.60	3.05	5.18	4.57	0.18	27.5	Blue	