




■ Product Image



■ Dimension Drawing

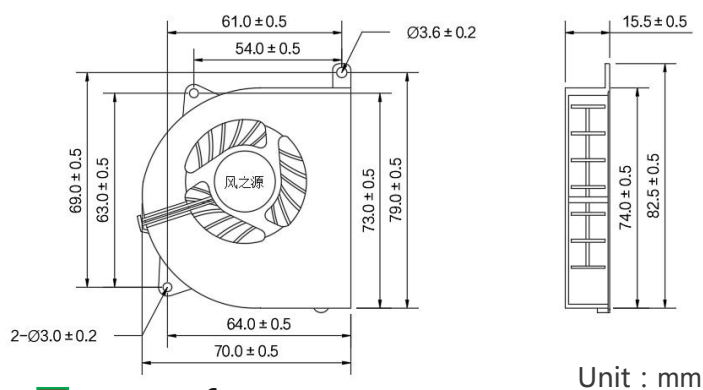

Fan Performance


Allowable Ambient Temperature Range : Working: -20°C ~ +80°C (Ball)
 -10°C ~ +70°C (Hydraulic)
 In stock : -40°C ~ +85°C (Ball)
 -20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

■ Specification

■ Performance Curve

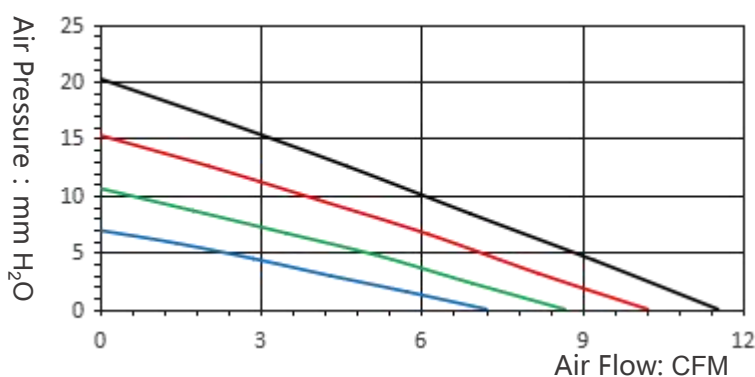

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
 Imperller : PBT Plastic (Black) UL94V-0
 Bearing System : Ball / Sleeve
 Leading Wire : UL1061 AWG26 + : Red - : Black
 * Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H₂O	dBA	Color	g
FD7015B4U-BP00	24	12~26.4	4000	0.14	3.36	11.53	19.59	20.24	0.80	40.3		40
FD7015B4H-BP00			3500	0.10	2.40	10.22	17.36	15.27	0.60	36.5		
FD7015B4M-BP00			3000	0.07	1.68	8.67	14.73	10.61	0.42	32.4		
FD7015B4L-BP00			2500	0.04	0.96	7.25	12.32	6.92	0.27	27.1		
FD7015B2U-BP00	12	6~14	4000	0.30	3.60	11.53	19.59	20.24	0.80	40.3		
FD70152H-BP00			3500	0.20	2.40	10.22	17.36	15.27	0.60	36.5		
FD7015B2M-BP00			3000	0.12	1.44	8.67	14.73	10.61	0.42	32.4		
FD7015B2L-BP00			2500	0.10	1.20	7.25	12.32	6.92	0.27	27.1		
FD7015B1U-BP00	5	3.5~5.5	4000	0.40	2.00	11.53	19.59	20.24	0.80	40.3		
FD7015B1H-BP00			3500	0.32	1.60	10.22	17.36	15.27	0.60	36.5		
FD7015B1M-BP00			3000	0.24	1.20	8.67	14.73	10.61	0.42	32.4		
FD7015B1L-BP00			2500	0.18	0.90	7.25	12.32	6.92	0.27	27.1		