


FD7515 (75x75x15mm)

Product Image



Dimension Drawing

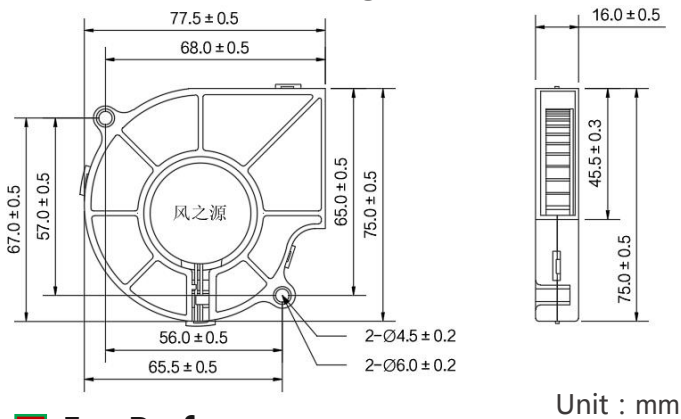

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

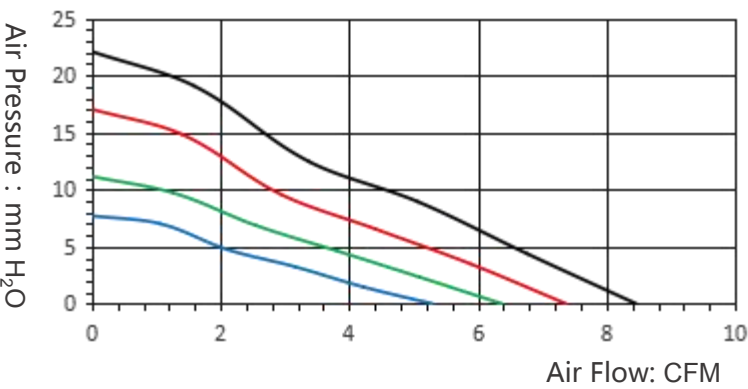

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD7515B4U-BP00	24	12~26.4	4000	0.15	3.60	8.43	14.32	22.09	0.87	45.8	●	50
FD7515B4H-BP00			3500	0.12	2.88	7.37	12.52	17.04	0.67	41.2	●	
FD7515B4M-BP00			3000	0.08	1.92	6.37	10.82	11.15	0.44	36.4	●	
FD7515B4L-BP00			2500	0.04	0.96	5.29	8.99	7.70	0.30	32.5	●	
FD7515B2U-BP00	12	6~14	4000	0.30	3.60	8.43	14.32	22.09	0.87	45.8	●	
FD7515B2H-BP00			3500	0.20	2.40	7.37	12.52	17.04	0.67	41.2	●	
FD7515B2M-BP00			3000	0.12	1.44	6.37	10.82	11.15	0.44	36.4	●	
FD7515B2L-BP00			2500	0.09	1.08	5.29	8.99	7.70	0.30	32.5	●	
FD7515B1U-BP00	5	3.5~5.5	4000	0.50	2.50	8.43	14.32	22.09	0.87	45.8	●	
FD7515B1H-BP00			3500	0.35	1.75	7.37	12.52	17.04	0.67	41.2	●	
FD7515B1M-BP00			3000	0.24	1.20	6.37	10.82	11.15	0.44	36.4	●	
FD7515B1L-BP00			2500	0.16	0.80	5.29	8.99	7.70	0.30	32.5	●	