


FD7525 (75x75x25mm)

Product Image



Dimension Drawing

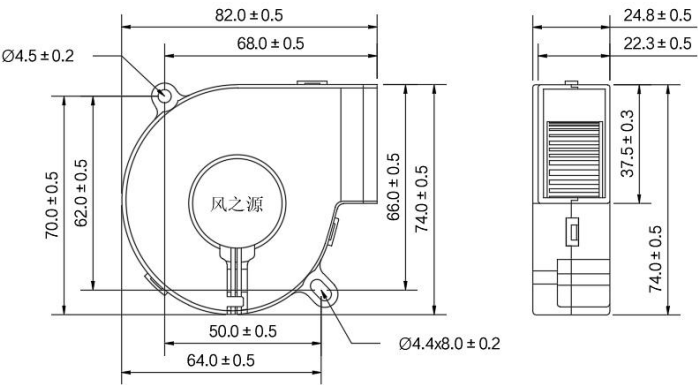

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

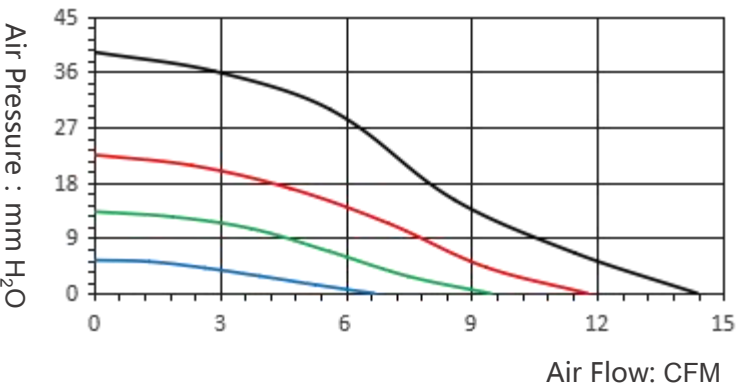

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H ₂ O	In H ₂ O	dBA	Color	
FD7525B4U-BP00	24	12~26.4	5500	0.30	7.20	14.38	24.43	39.20	1.54	57.1	●	68
FD7525B4H-BP00			4500	0.20	4.80	11.76	19.98	22.51	0.89	50.7	●	
FD7525B4M-BP00			3500	0.10	2.40	9.45	16.06	13.28	0.52	43.6	●	
FD7525B4L-BP00			2500	0.05	1.20	6.68	11.35	5.40	0.21	38.0	●	
FD7525B2U-BP00	12	6~14	5500	0.60	7.20	14.38	24.43	39.20	1.54	57.1	●	
FD7525B2H-BP00			4500	0.25	3.00	11.76	19.98	22.51	0.89	50.7	●	
FD7525B2M-BP00			3500	0.15	1.80	9.45	16.06	13.28	0.52	43.6	●	
FD7525B2L-BP00			2500	0.07	0.84	6.68	11.35	5.40	0.21	38.0	●	
FD7525B1U-BP00	5	3.5~5.5	5500	0.80	4.00	14.38	24.43	39.20	1.54	57.1	●	
FD7525B1H-BP00			4500	0.40	2.00	11.76	19.98	22.51	0.89	50.7	●	
FD7525B1M-BP00			3500	0.25	1.25	9.45	16.06	13.28	0.52	43.6	●	
FD7525B1L-BP00			2500	0.15	0.75	6.68	11.35	5.40	0.21	38.0	●	