



FD8025 (80x80x25mm)

Product Image

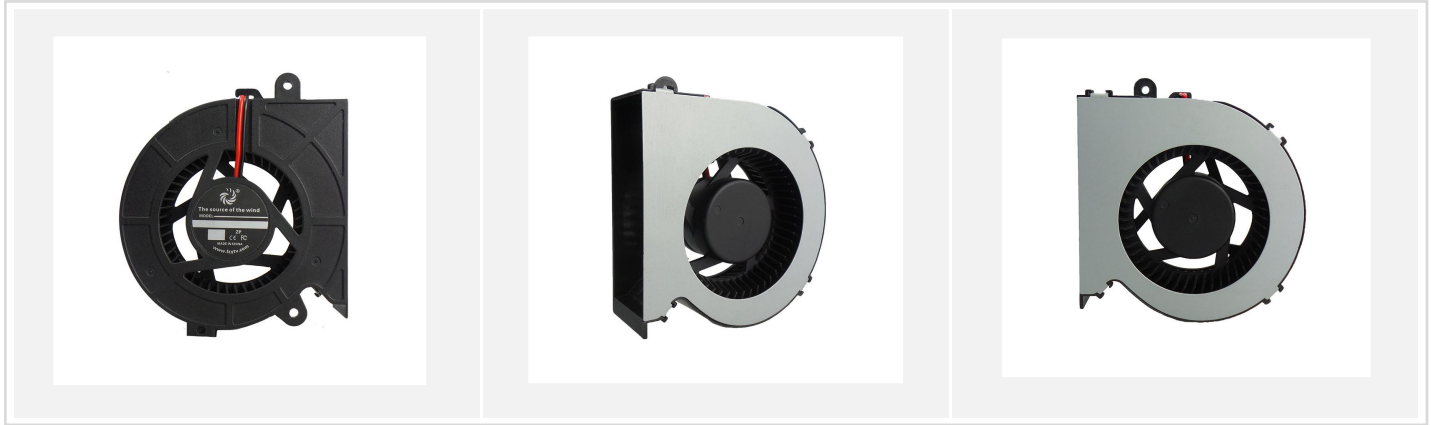

Dimension Drawing

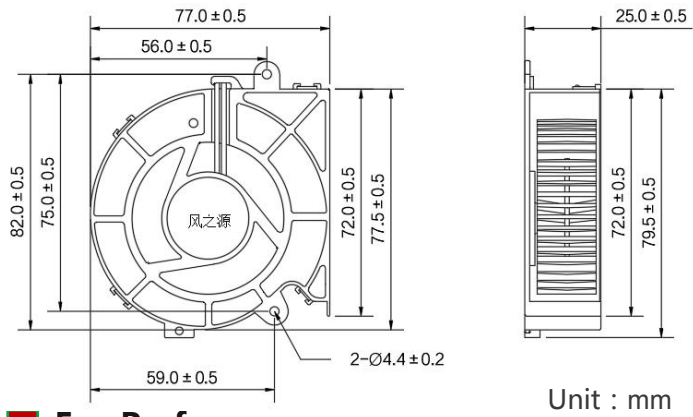

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

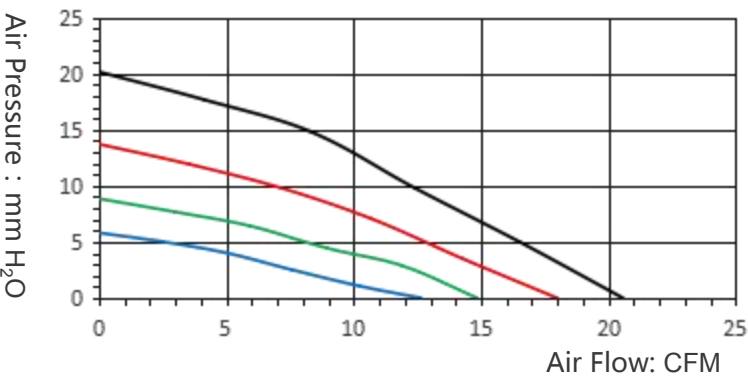

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD8025B4U-BP00	24	12~26.4	4000	0.20	4.80	20.57	34.95	20.15	0.79	43.6	Black	60
FD8025B4H-BP00			3500	0.14	3.36	17.99	30.57	13.71	0.54	38.7	Red	
FD8025B4M-BP00			3000	0.09	2.16	14.85	25.23	8.85	0.35	32.8	Green	
FD8025B4L-BP00			2500	0.05	1.20	12.65	21.49	5.81	0.23	25.4	Blue	
FD8025B2U-BP00	12	6~14	4000	0.50	6.00	20.57	34.95	20.15	0.79	43.6	Black	
FD8025B2H-BP00			3500	0.35	4.20	17.99	30.57	13.71	0.54	38.7	Red	
FD8025B2M-BP00			3000	0.20	2.40	14.85	25.23	8.85	0.35	32.8	Green	
FD8025B2L-BP00			2500	0.15	1.80	12.65	21.49	5.81	0.23	25.4	Blue	
FD8025B1U-BP00	5	3.5~5.5	4000	0.75	3.75	20.57	34.95	20.15	0.79	43.6	Black	
FD8025B1H-BP00			3500	0.50	2.50	17.99	30.57	13.71	0.54	38.7	Red	
FD8025B1M-BP00			3000	0.35	1.75	14.85	25.23	8.85	0.35	32.8	Green	
FD8025B1L-BP00			2500	0.25	1.25	12.65	21.49	5.81	0.23	25.4	Blue	