


FD8030 (80x80x30mm)

Product Image



Dimension Drawing

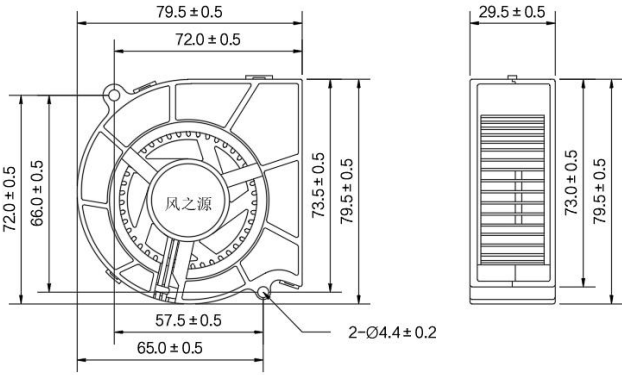

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

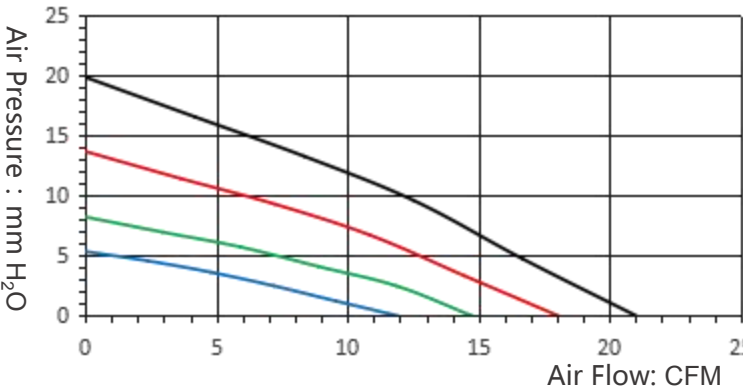

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD8030B4U-BP00	24	12~26.4	3500	0.16	3.84	21.03	35.73	19.87	0.78	42.4	●	70
FD8030B4H-BP00			3000	0.12	2.88	18.06	30.68	13.69	0.54	38.6	●	
FD8030B4M-BP00			2500	0.08	1.92	14.77	25.09	8.24	0.32	33.1	●	
FD8030B4L-BP00			2000	0.05	1.20	11.95	20.30	5.36	0.21	29.2	●	
FD8030B2U-BP00	12	6~14	3500	0.40	4.80	21.03	35.73	19.87	0.78	42.40	●	
FD8030B2H-BP00			3000	0.30	3.60	18.06	30.68	13.69	0.54	38.60	●	
FD8030B2M-BP00			2500	0.18	2.16	14.77	25.09	8.24	0.32	33.10	●	
FD8030B2L-BP00			2000	0.14	1.68	11.95	20.30	5.36	0.21	29.20	●	
FD8030B1U-BP00	5	3.5~5.5	3500	0.70	3.50	21.03	35.73	19.87	0.78	42.40	●	
FD8030B1H-BP00			3000	0.50	2.50	18.06	30.68	13.69	0.54	38.60	●	
FD8030B1M-BP00			2500	0.30	1.50	14.77	25.09	8.24	0.32	33.10	●	
FD8030B1L-BP00			2000	0.20	1.00	11.95	20.30	5.36	0.21	29.20	●	