


FD9330 (93x93x30mm)

Product Image



Dimension Drawing

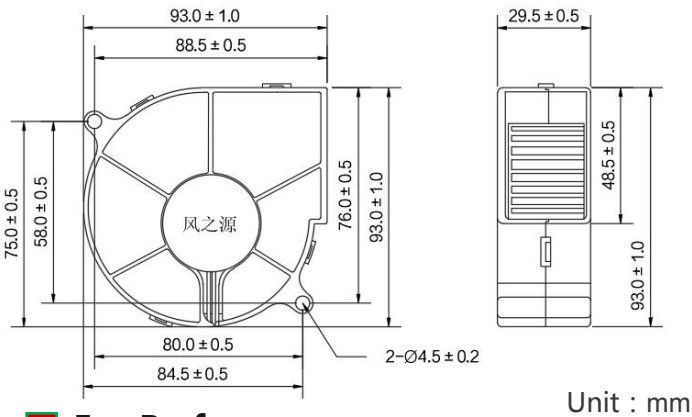

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

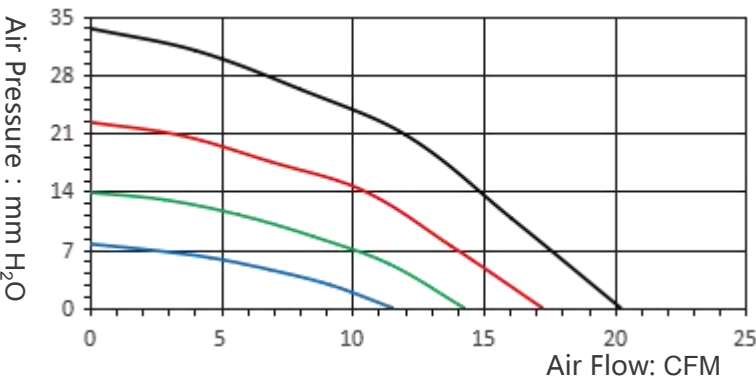

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD9330B4U-BP00	24	12~26.4	3500	0.25	6.00	20.22	34.35	33.55	1.32	47.6	Black	112
FD9330B4H-BP00			3000	0.15	3.60	17.24	29.29	22.28	0.88	44.7	Red	
FD9330B4M-BP00			2500	0.10	2.40	14.26	24.23	13.84	0.55	41.6	Green	
FD9330B4L-BP00			2000	0.06	1.44	11.53	19.59	7.67	0.30	37.2	Blue	
FD9330B2U-BP00	12	6~14	3500	0.50	6.00	20.22	34.35	33.55	1.32	47.6	Black	
FD9330B2H-BP00			3000	0.35	4.20	17.24	29.29	22.28	0.88	44.7	Red	
FD9330B2M-BP00			2500	0.25	3.00	14.26	24.23	13.84	0.55	41.6	Green	
FD9330B2L-BP00			2000	0.15	1.80	11.53	19.59	7.67	0.30	37.2	Blue	