


FD9330 (93x93x30mm)


Product Image



Dimension Drawing

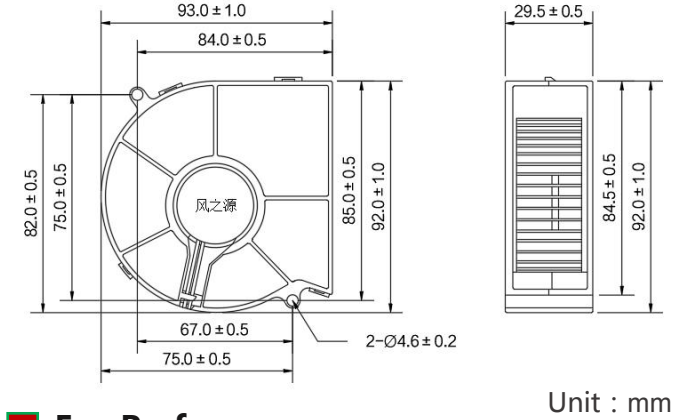

Performance Curve

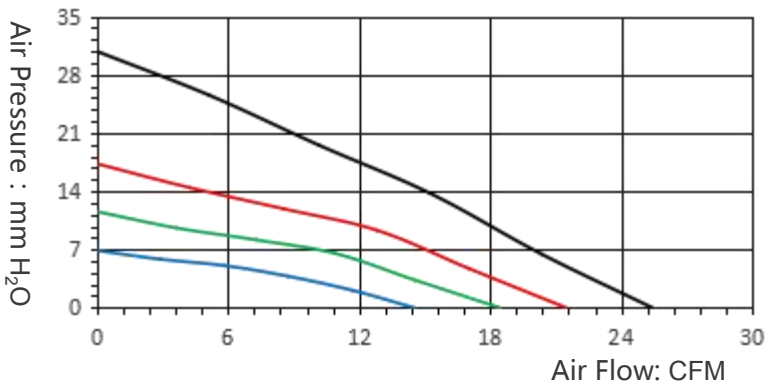

Fan Performance

Allowable Ambinet : Working: -20℃ ~ +80℃ (Ball)
Temperature Range -10℃ ~ +70℃ (Hydraulic)
In stock : -40℃ ~ +85℃ (Ball)
 -20℃~+75℃ (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Imperller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40℃ 50, 000 hours (Ball)
 40℃ 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipmentand so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD9330B4U-BP00	24	12~26.4	3500	0.25	6.00	25.42	43.19	30.80	1.21	46.2		105
FD9330B4H-BP00			3000	0.15	3.60	21.47	36.48	17.29	0.68	42.3		
FD9330B4M-BP00			2500	0.10	2.40	18.43	31.31	11.54	0.45	39.2		
FD9330B4L-BP00			2000	0.06	1.44	14.51	24.65	6.86	0.27	34.8		
FD9330B2U-BP00	12	6~14	3500	0.65	7.80	25.42	43.19	30.80	1.21	46.2		
FD9330B2H-BP00			3000	0.50	6.00	21.47	36.48	17.29	0.68	42.3		
FD9330B2M-BP00			2500	0.40	4.80	18.43	31.31	11.54	0.45	39.2		
FD9330B2L-BP00			2000	0.20	2.40	14.51	24.65	6.86	0.27	34.8		