


FD9733 (97x97x33mm)

Product Image



Dimension Drawing

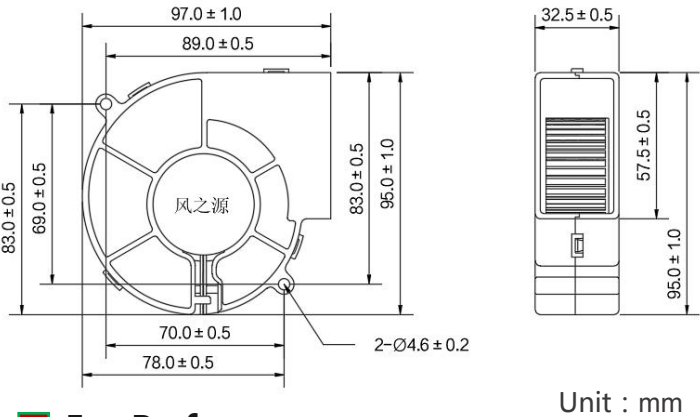

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

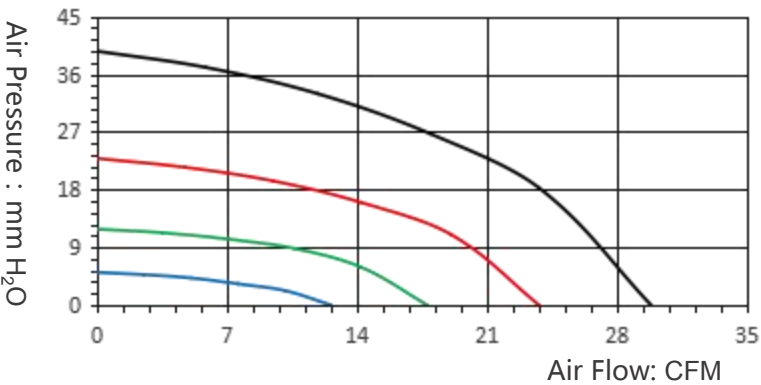

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD9733B6U-BP00	48	43.6~52.8	5000	0.20	9.60	29.80	50.63	39.58	1.56	61.4	●	100
FD9733B6H-BP00			4000	0.10	4.80	23.78	40.40	22.86	0.90	57.1	●	
FD9733B6M-BP00			3000	0.05	2.40	17.77	30.19	11.84	0.47	50.6	●	
FD9733B6L-BP00			2000	0.03	1.44	12.60	21.41	5.09	0.20	41.3	●	
FD9733B4U-BP00	24	12~26.4	5000	0.50	12.00	29.80	50.63	39.58	1.56	61.4	●	
FD9733B4H-BP00			4000	0.35	8.40	23.78	40.40	22.86	0.90	57.1	●	
FD9733B4M-BP00			3000	0.10	2.40	17.77	30.19	11.84	0.47	50.6	●	
FD9733B4L-BP00			2000	0.04	0.96	12.60	21.41	5.09	0.20	41.3	●	
FD9733B2U-BP00	12	6~14	5000	1.20	14.40	29.80	50.63	39.58	1.56	61.40	●	
FD9733B2H-BP00			4000	0.60	7.20	23.78	40.40	22.86	0.90	57.10	●	
FD9733B2M-BP00			3000	0.18	2.16	17.77	30.19	11.84	0.47	50.60	●	
FD9733B2L-BP00			2000	0.09	1.08	12.60	21.41	5.09	0.20	41.30	●	