


FD1232 (120x120x32mm)

Product Image



Dimension Drawing

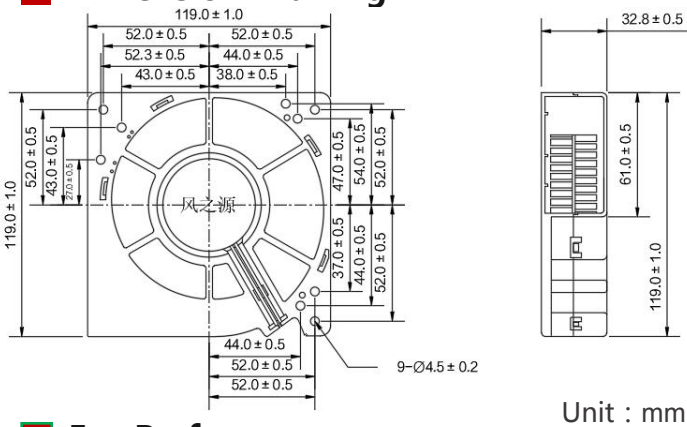

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

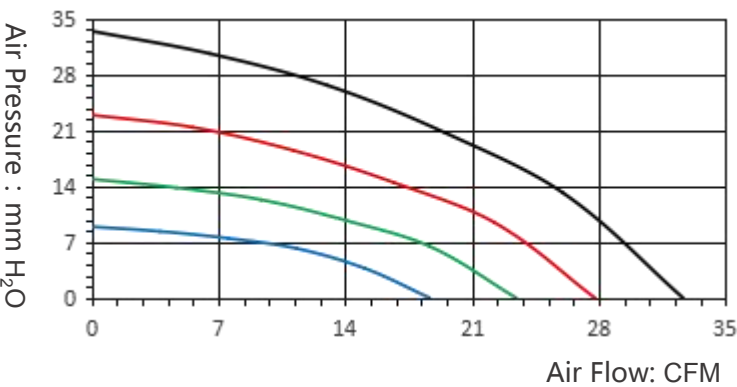

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H ₂ O	In H ₂ O	dBA	Color	g
FD1232B6U-BP00	48	43.6~52.8	3500	0.30	14.40	32.66	55.49	33.39	1.32	56.40	●	205.7g
FD1232B6H-BP00			3000	0.20	9.60	27.79	47.22	22.89	0.90	52.70	●	
FD1232B6M-BP00			2500	0.10	4.80	23.44	39.82	14.86	0.59	47.50	●	
FD1232B6L-BP00			2000	0.05	2.40	18.66	31.70	8.90	0.35	44.30	●	
FD1232B4U-BP00	24	12~26.4	3500	0.80	19.20	32.66	55.49	33.39	1.32	56.40	●	
FD1232B4H-BP00			3000	0.50	12.00	27.79	47.22	22.89	0.90	52.70	●	
FD1232B4M-BP00			2500	0.25	6.00	23.44	39.82	14.86	0.59	47.50	●	
FD1232B4L-BP00			2000	0.10	2.40	18.66	31.70	8.90	0.35	44.30	●	
FD1232B2U-BP00	12	6~14	3500	1.30	15.60	32.66	55.49	33.39	1.32	56.40	●	
FD1232B2H-BP00			3000	0.70	8.40	27.79	47.22	22.89	0.90	52.70	●	
FD1232B2M-BP00			2500	0.40	4.80	23.44	39.82	14.86	0.59	47.50	●	
FD1232B2L-BP00			2000	0.25	3.00	18.66	31.70	8.90	0.35	44.30	●	