


FD2510 (25x25x10mm)

Product Image



Dimension Drawing

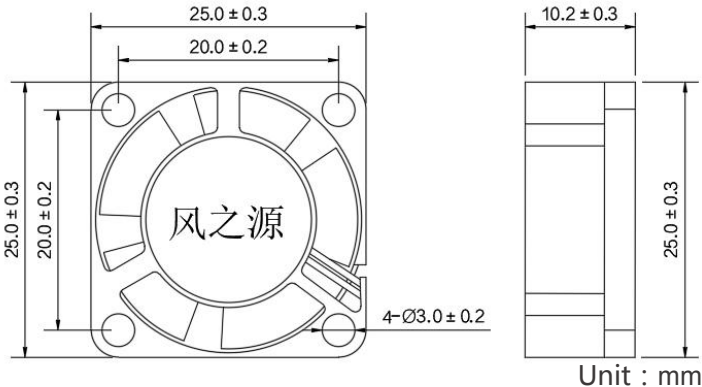

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

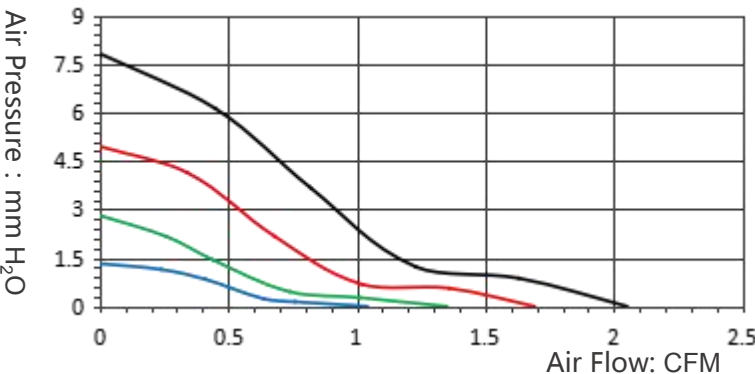

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	Amp	W	CFM	m³/h	mm H2O	InH ₂ O	dBA	Color	g
FD2510B2U-AP00	12	6~14	12000	0.06	0.72	2.05	3.48	7.82	0.31	32.2	Black	7
FD2510B2H-AP00			10000	0.05	0.60	1.69	2.87	4.95	0.20	26.9	Red	
FD2510B2M-AP00			8000	0.04	0.48	1.35	2.29	1.81	0.07	22.7	Green	
FD2510B2L-AP00			6000	0.03	0.36	1.04	1.77	1.32	0.05	20.8	Blue	
FD2510B1U-AP00	5	3.5~5.5	12000	0.14	0.70	2.05	3.48	7.82	0.31	32.2	Black	
FD2510B1H-AP00			10000	0.09	0.45	1.69	2.87	4.95	0.20	26.9	Red	
FD2510B1M-AP00			8000	0.07	0.35	1.35	2.29	1.81	0.07	22.7	Green	
FD2510B1L-AP00			6000	0.05	0.25	1.04	1.77	1.32	0.05	20.8	Blue	

Operation direction: Clockwise as observed from the label.

Air supply direction: Side of label.

※ The above specifications are for reference and the final specifications are subject to change.