


FD3510 (35x35x10mm)

Product Image



Dimension Drawing

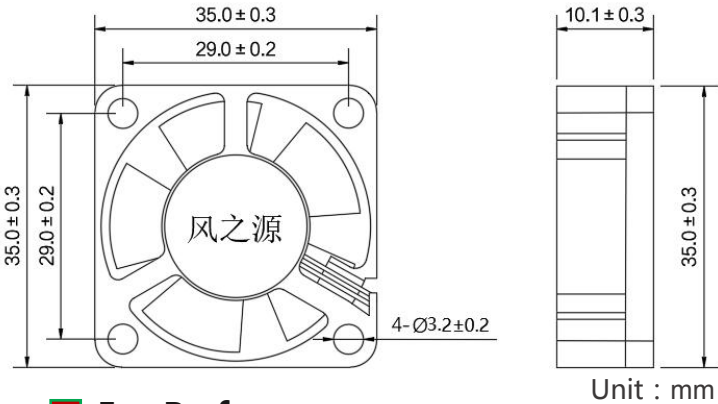

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

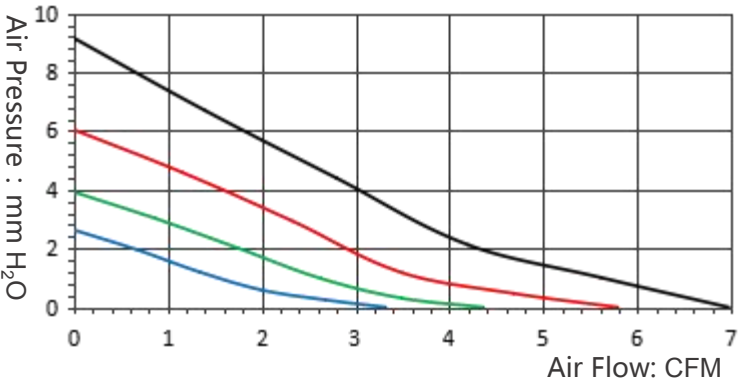

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	Amp	W	CFM	m³/h	mmH2O	InH₂O	dBA	Color	g
FD3510B2U-AP00	12	6~14	12000	0.10	1.20	6.97	11.84	9.16	0.36	36.80	Black	9
FD3510B2H-AP00			10000	0.08	0.96	5.79	9.84	6.04	0.24	32.50	Red	
FD3510B2M-AP00			8000	0.06	0.72	4.36	7.41	3.92	0.15	27.80	Green	
FD3510B2L-AP00			6000	0.04	0.48	3.32	5.64	2.63	0.10	22.70	Blue	
FD3510B1U-AP00	5	3.5~5.5	12000	0.20	1.00	6.97	11.84	9.16	0.36	36.80	Black	
FD3510B1H-AP00			10000	0.16	0.80	5.79	9.84	6.04	0.24	32.50	Red	
FD3510B1M-AP00			8000	0.12	0.60	4.36	7.41	3.92	0.15	27.80	Green	
FD3510B1L-AP00			6000	0.08	0.40	3.32	5.64	2.63	0.10	22.70	Blue	

Operation direction: Clockwise as observed from the label.
Air supply direction: Side of label.
※ The above specifications are for reference and the final specifications are subject to change.