


FD4010 (40x40x10mm)

Product Image




Dimension Drawing

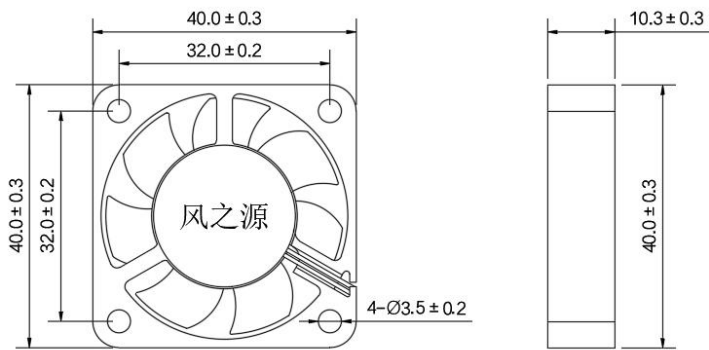

Unit : mm

Performance Curve

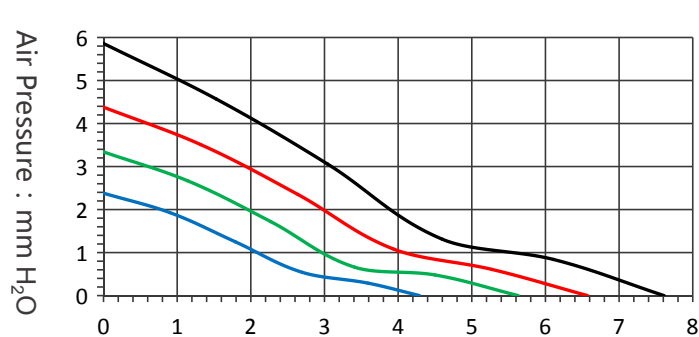

Air Flow: CFM

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1061 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	Amp	W	CFM	m³/h	mmH ₂ O	InH ₂ O	dBA	Color	g
FD4010B4U-AP00	24	12~26.4	8000	0.06	1.44	7.61	12.93	5.86	0.23	37.6	Black	13
FD4010B4H-AP00			7000	0.05	1.20	6.57	11.16	4.38	0.17	31.3	Red	
FD4010B4M-AP00			6000	0.04	0.96	5.63	9.57	3.34	0.13	27.3	Green	
FD4010B4L-AP00			5000	0.03	0.72	4.29	7.29	2.38	0.09	24.1	Blue	
FD4010B2U-AP00	12	6~14	8000	0.10	1.20	7.61	12.93	5.86	0.23	37.6	Black	
FD4010B2H-AP00			7000	0.08	0.96	6.57	11.16	4.38	0.17	31.3	Red	
FD4010B2M-AP00			6000	0.06	0.72	5.63	9.57	3.34	0.13	27.3	Green	
FD4010B2L-AP00			5000	0.04	0.48	4.29	7.29	2.38	0.09	24.1	Blue	
FD4010B1U-AP00	5	3.5~5.5	8000	0.24	1.20	7.61	12.93	5.86	0.23	37.6	Black	
FD4010B1H-AP00			7000	0.16	0.80	6.57	11.16	4.38	0.17	31.3	Red	
FD4010B1M-AP00			6000	0.10	0.50	5.63	9.57	3.34	0.13	27.3	Green	
FD4010B1L-AP00			5000	0.08	0.40	4.29	7.29	2.38	0.09	24.1	Blue	