


FD5015 (50x50x15mm)


Product Image



Dimension Drawing

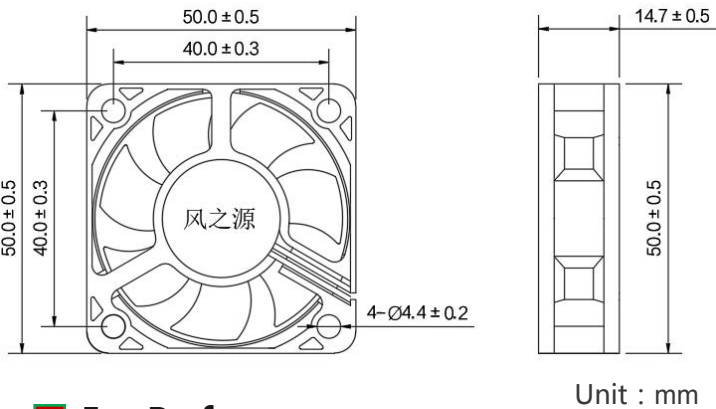

Performance Curve

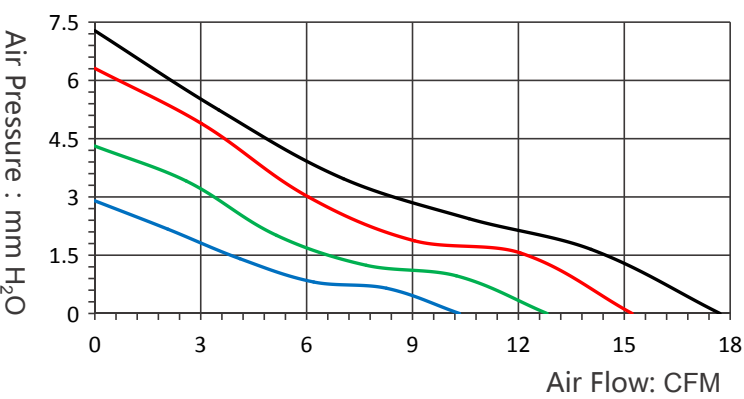

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H ₂ O	In H ₂ O	dBA	Color	g
FD5015B4U-AP00	24	12~26.4	7000	0.09	2.16	17.71	30.09	7.28	0.29	38.70	Black	25
FD5015B4H-AP00			6000	0.06	1.44	15.22	25.86	6.31	0.25	33.80	Red	
FD5015B4M-AP00			5000	0.04	0.96	12.81	21.76	4.31	0.17	30.10	Green	
FD5015B4L-AP00			4000	0.02	0.48	10.33	17.55	2.90	0.11	25.40	Blue	
FD5015B2U-AP00	12	6~14	7000	0.14	1.68	17.71	30.09	7.28	0.29	38.70	Black	
FD5015B2H-AP00			6000	0.10	1.20	15.22	25.86	6.31	0.25	33.80	Red	
FD5015B2M-AP00			5000	0.07	0.84	12.81	21.76	4.31	0.17	30.10	Green	
FD5015B2L-AP00			4000	0.04	0.48	10.33	17.55	2.90	0.11	25.40	Blue	
FD5015B1U-AP00	5	3.5~5.5	7000	0.30	1.50	17.71	30.09	7.28	0.29	38.70	Black	
FD5015B1H-AP00			6000	0.20	1.00	15.22	25.86	6.31	0.25	33.80	Red	
FD5015B1M-AP00			5000	0.10	0.50	12.81	21.76	4.31	0.17	30.10	Green	
FD5015B1L-AP00			4000	0.06	0.30	10.33	17.55	2.90	0.11	25.40	Blue	