


FD5020 (50x50x20mm)

Product Image



Dimension Drawing

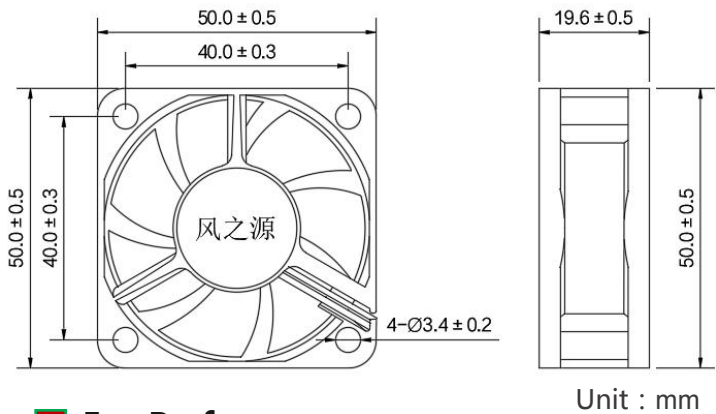

Fan Performance


Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Performance Curve

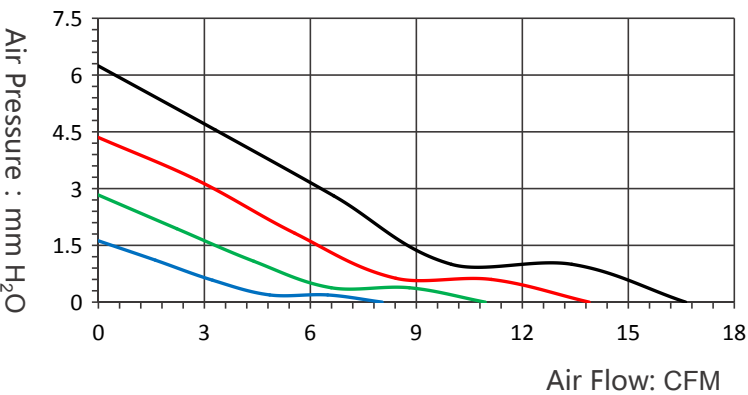

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD5020B4U-AP00	24	12~26.4	6000	0.06	1.44	16.62	28.24	6.24	0.25	37.80	●	30
FD5020B4H-AP00			5000	0.04	0.96	13.89	23.60	4.35	0.17	33.70	●	
FD5020B4M-AP00			4000	0.03	0.72	10.95	18.60	2.83	0.11	29.40	●	
FD5020B4L-AP00			3000	0.02	0.48	8.03	13.64	1.62	0.06	23.90	●	
FD5020B2U-AP00	12	6~14	6500	0.16	1.92	16.62	28.24	6.24	0.25	37.80	●	
FD5020B2H-AP00			5000	0.08	0.96	13.89	23.60	4.35	0.17	33.70	●	
FD5020B2M-AP00			4000	0.05	0.60	10.95	18.60	2.83	0.11	29.40	●	
FD5020B2L-AP00			3000	0.03	0.36	8.03	13.64	1.62	0.06	23.90	●	
FD5020B1U-AP00	5	3.5~5.5	6000	0.20	1.00	16.62	28.24	6.24	0.25	37.80	●	
FD5020B1H-AP00			5000	0.15	0.75	13.89	23.60	4.35	0.17	33.70	●	
FD5020B1M-AP00			4000	0.10	0.50	10.95	18.60	2.83	0.11	29.40	●	
FD5020B1L-AP00			3000	0.06	0.30	8.03	13.64	1.62	0.06	23.90	●	