


FD6010 (60x60x10mm)

Product Image



Dimension Drawing

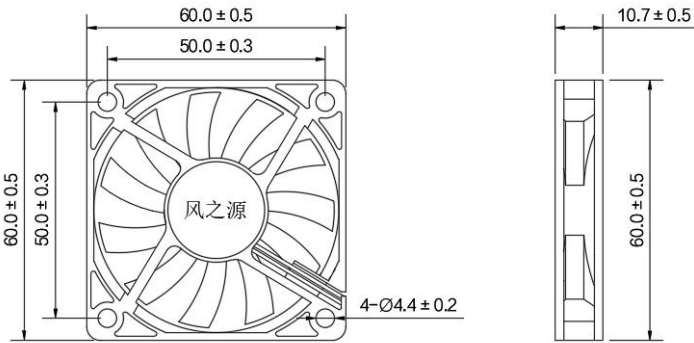

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)


Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6010B4U-AP00	24	12~26.4	4500	0.10	2.40	16.76	28.48	2.82	0.11	36.50	Black	23
FD6010B4H-AP00			4000	0.04	0.96	14.74	25.04	2.28	0.09	32.30	Red	
FD6010B4M-AP00			3500	0.03	0.72	12.94	21.99	1.70	0.07	29.20	Green	
FD6010B4L-AP00			3000	0.02	0.48	10.77	18.30	1.22	0.05	26.70	Blue	
FD6010B2U-AP00	12	6~14	4500	0.15	1.80	16.76	28.48	2.82	0.11	36.50	Black	
FD6010B2H-AP00			4000	0.08	0.96	14.74	25.04	2.28	0.09	32.30	Red	
FD6010B2M-AP00			3500	0.06	0.72	12.94	21.99	1.70	0.07	29.20	Green	
FD6010B2L-AP00			3000	0.04	0.48	10.77	18.30	1.22	0.05	26.70	Blue	
FD6010B1U-AP00	5	3.5~5.5	4500	0.25	1.25	16.76	28.48	2.82	0.11	36.50	Black	
FD6010B1H-AP00			4000	0.20	1.00	14.74	25.04	2.28	0.09	32.30	Red	
FD6010B1M-AP00			3500	0.12	0.60	12.94	21.99	1.70	0.07	29.20	Green	
FD6010B1L-AP00			3000	0.08	0.40	10.77	18.30	1.22	0.05	26.70	Blue	

Performance Curve

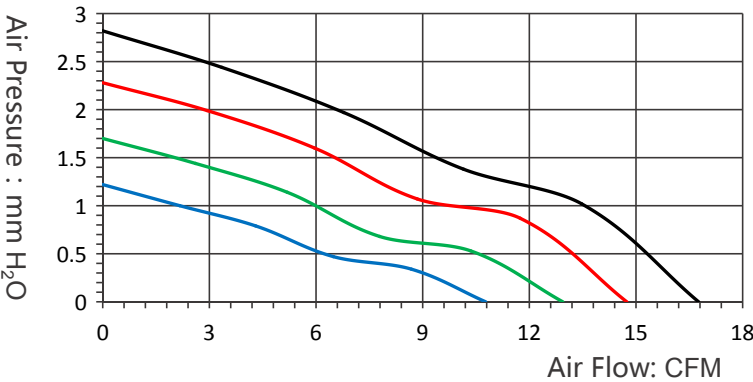

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.