


FD6015 (60x60x15mm)

Product Image




Dimension Drawing

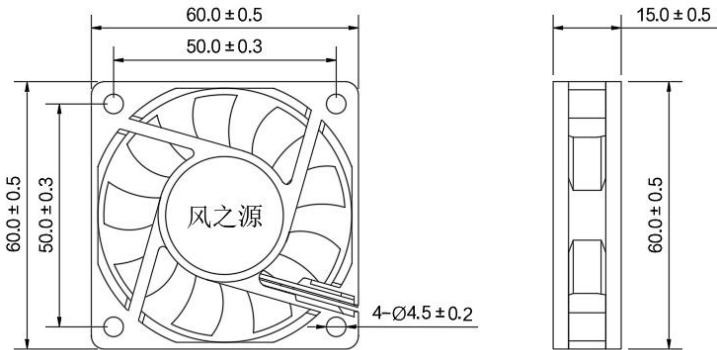

Unit : mm

Performance Curve

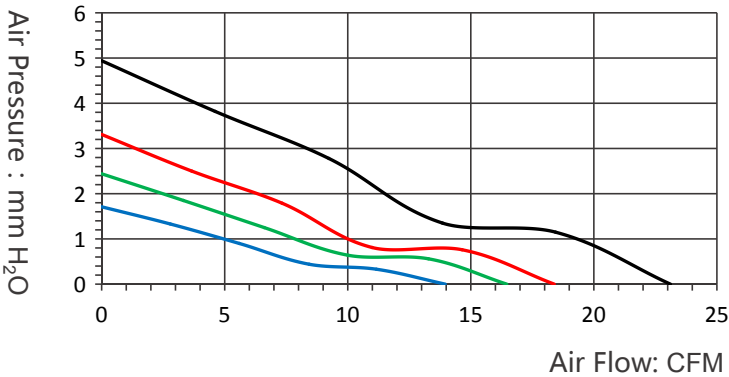

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6015B4U-AP00	24	12~26.4	5000	0.12	2.88	23.11	39.26	4.94	0.19	39.3	Black	28
FD6015B4H-AP00			4000	0.05	1.20	18.39	31.24	3.31	0.13	31.9	Red	
FD6015B4M-AP00			3500	0.04	0.96	16.46	27.97	2.44	0.10	28.8	Green	
FD6015B4L-AP00			3000	0.03	0.72	13.96	23.72	1.71	0.07	25.6	Blue	
FD6015B2U-AP00	12	6~14	5000	0.15	1.80	23.11	39.26	4.94	0.19	39.3	Black	
FD6015B2H-AP00			4000	0.07	0.84	18.39	31.24	3.31	0.13	31.9	Red	
FD6015B2M-AP00			3500	0.06	0.72	16.46	27.97	2.44	0.10	28.8	Green	
FD6015B2L-AP00			3000	0.05	0.60	13.96	23.72	1.71	0.07	25.6	Blue	
FD6015B1U-AP00	5	3.5~5.5	5000	0.30	1.50	23.11	39.26	4.94	0.19	39.3	Black	
FD6015B1H-AP00			4000	0.20	1.00	18.39	31.24	3.31	0.13	31.9	Red	
FD6015B1M-AP00			3500	0.15	0.75	16.46	27.97	2.44	0.10	28.8	Green	
FD6015B1L-AP00			3000	0.10	0.50	13.96	23.72	1.71	0.07	25.6	Blue	