


FD6025 (60x60x25mm)

Product Image



Dimension Drawing

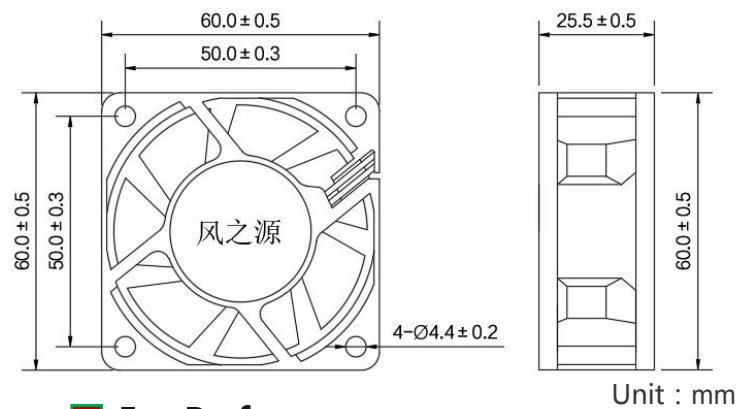

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)


Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD6025B4U-AP00	24	12~26.4	6000	0.20	4.80	28.16	47.84	9.97	0.39	42.70	Black	53
FD6025B4H-AP00			5000	0.12	2.88	24.43	41.51	7.04	0.28	36.30	Red	
FD6025B4M-AP00			4000	0.06	1.44	19.26	32.72	4.49	0.18	30.60	Green	
FD6025B4L-AP00			3000	0.03	0.72	14.68	24.94	2.49	0.10	25.90	Blue	
FD6025B2U-AP00	12	6~14	6000	0.30	3.60	28.16	47.84	9.97	0.39	42.70	Black	
FD6025B2H-AP00			5000	0.20	2.40	24.43	41.51	7.04	0.28	36.30	Red	
FD6025B2M-AP00			4000	0.12	1.44	19.26	32.72	4.49	0.18	30.60	Green	
FD6025B2L-AP00			3000	0.08	0.96	14.68	24.94	2.49	0.10	25.90	Blue	
FD6025B1U-AP00	5	3.5~5.5	6000	0.55	2.75	28.16	47.84	9.97	0.39	42.70	Black	
FD6025B1H-AP00			5000	0.35	1.75	24.43	41.51	7.04	0.28	36.30	Red	
FD6025B1M-AP00			4000	0.20	1.00	19.26	32.72	4.49	0.18	30.60	Green	
FD6025B1L-AP00			3000	0.12	0.60	14.68	24.94	2.49	0.10	25.90	Blue	

Performance Curve

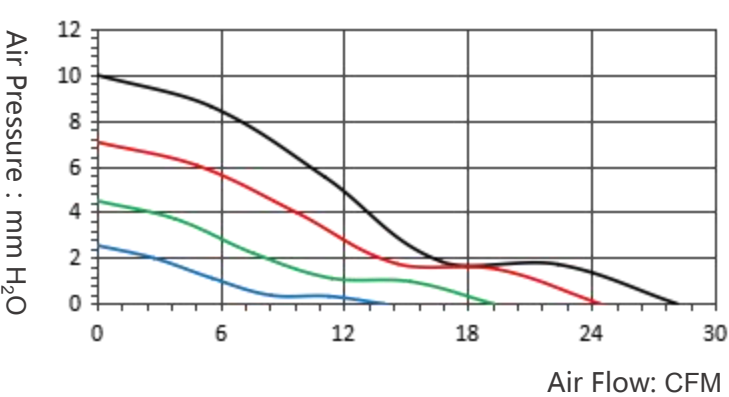

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.