


FD7015 (70x70x15mm)


Product Image



Dimension Drawing

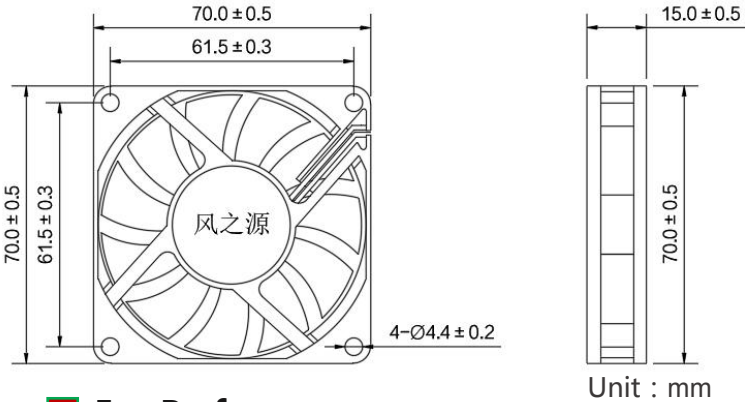

Performance Curve

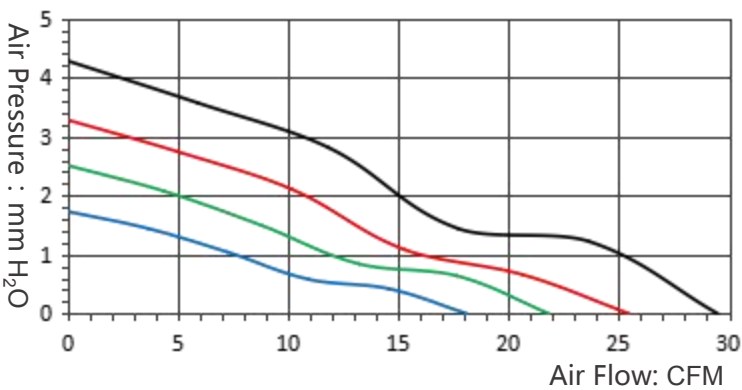

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD7015B4U-AP00	24	12~26.4	4000	0.08	1.92	29.48	50.09	4.28	0.17	35.20	Black	45
FD7015B4H-AP00			3500	0.06	1.44	25.46	43.26	3.28	0.13	32.70	Red	
FD7015B4M-AP00			3000	0.04	0.96	21.83	37.09	2.51	0.10	29.30	Green	
FD7015B4L-AP00			2500	0.02	0.48	18.10	30.75	1.73	0.07	25.80	Blue	
FD7015B2U-AP00	12	6~14	4000	0.18	1.68	29.48	50.09	4.28	0.17	35.20	Black	
FD7015B2H-AP00			3500	0.12	1.44	25.46	43.26	3.28	0.13	32.70	Red	
FD7015B2M-AP00			3000	0.08	0.96	21.83	37.09	2.51	0.10	29.30	Green	
FD7015B2L-AP00			2500	0.05	0.60	18.10	30.75	1.73	0.07	25.80	Blue	
FD7015B1U-AP00	5	3.5~5.5	4000	0.35	1.75	29.48	50.09	4.28	0.17	35.20	Black	
FD7015B1H-AP00			3500	0.25	1.25	25.46	43.26	3.28	0.13	32.70	Red	
FD7015B1M-AP00			3000	0.20	1.00	21.83	37.09	2.51	0.10	29.30	Green	
FD7015B1L-AP00			2500	0.10	0.50	18.10	30.75	1.73	0.07	25.80	Blue	