


FD7020 (70x70x20mm)


Product Image



Dimension Drawing

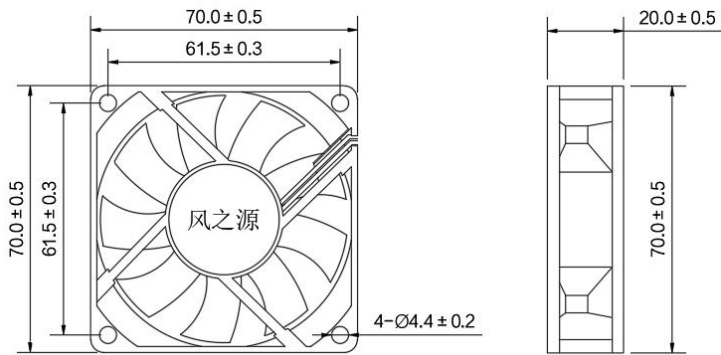

Performance Curve

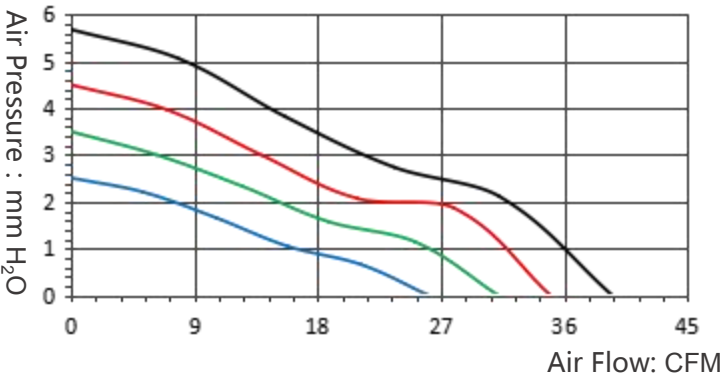

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H ₂ O	In H ₂ O	dBA	Color	g
FD7020B4U-AP00	24	12~26.4	4500	0.15	3.60	39.52	67.14	5.68	0.22	40.20	●	56
FD7020B4H-AP00			4000	0.09	2.16	35.01	59.48	4.50	0.18	37.30	●	
FD7020B4M-AP00			3500	0.06	1.44	31.20	53.01	3.50	0.14	34.20	●	
FD7020B4L-AP00			3000	0.04	0.96	26.12	44.38	2.51	0.10	30.50	●	
FD7020B2U-AP00	12	6~14	4500	0.30	3.60	39.52	67.14	5.68	0.22	40.20	●	
FD7020B2H-AP00			4000	0.20	2.40	35.01	59.48	4.50	0.18	37.30	●	
FD7020B2M-AP00			3500	0.15	1.80	31.20	53.01	3.50	0.14	34.20	●	
FD7020B2L-AP00			3000	0.08	0.96	26.12	44.38	2.51	0.10	30.50	●	
FD7020B1U-AP00	5	3.5~5.5	4500	0.50	2.50	39.52	67.14	5.68	0.22	40.20	●	
FD7020B1H-AP00			4000	0.35	1.75	35.01	59.48	4.50	0.18	37.30	●	
FD7020B1M-AP00			3500	0.25	1.25	31.20	53.01	3.50	0.14	34.20	●	
FD7020B1L-AP00			3000	0.15	0.75	26.12	44.38	2.51	0.10	30.50	●	