


FD7025 (70x70x25mm)

Product Image



Dimension Drawing

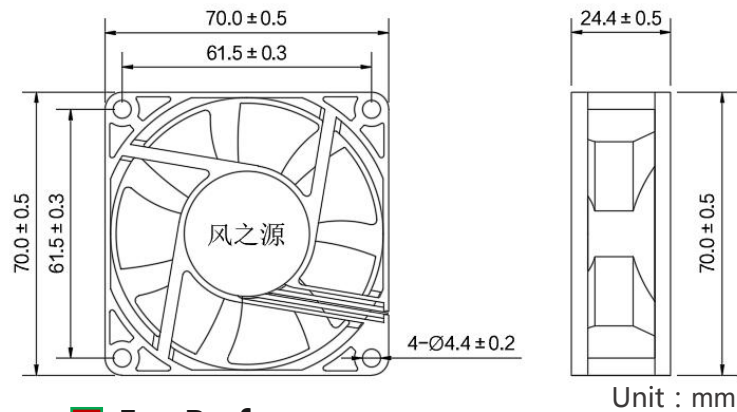

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)


Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD7025B4U-AP00	24	12~26.4	5500	0.20	4.80	43.78	74.38	10.45	0.41	47.50	Black	47.50
FD7025B4H-AP00			4500	0.14	3.36	36.00	61.16	7.19	0.28	41.70	Red	
FD7025B4M-AP00			3500	0.08	1.92	28.04	47.64	4.38	0.17	35.40	Green	
FD7025B4L-AP00			2500	0.04	0.96	19.78	33.61	2.28	0.09	28.80	Blue	
FD7025B2U-AP00	12	6~14	5500	0.30	3.60	43.78	74.38	10.45	0.41	47.50	Black	
FD7025B2H-AP00			4500	0.20	2.40	36.00	61.16	7.19	0.28	41.70	Red	
FD7025B2M-AP00			3500	0.12	1.44	28.04	47.64	4.38	0.17	35.40	Green	
FD7025B2L-AP00			2500	0.06	0.72	19.78	33.61	2.28	0.09	28.80	Blue	
FD7025B1U-AP00	5	3.5~5.5	5500	0.45	2.25	43.78	74.38	10.45	0.41	47.50	Black	
FD7025B1H-AP00			4500	0.30	1.50	36.00	61.16	7.19	0.28	41.70	Red	
FD7025B1M-AP00			3500	0.18	0.90	28.04	47.64	4.38	0.17	35.40	Green	
FD7025B1L-AP00			2500	0.10	0.50	19.78	33.61	2.28	0.09	28.80	Blue	

Performance Curve

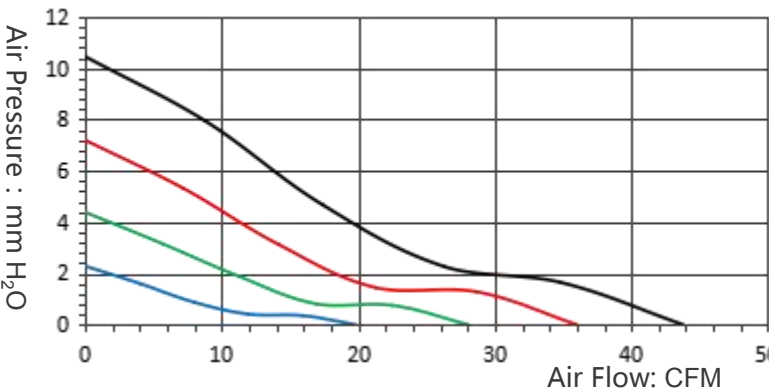

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.