


FD8015 (80x80x15mm)

Product Image



Dimension Drawing

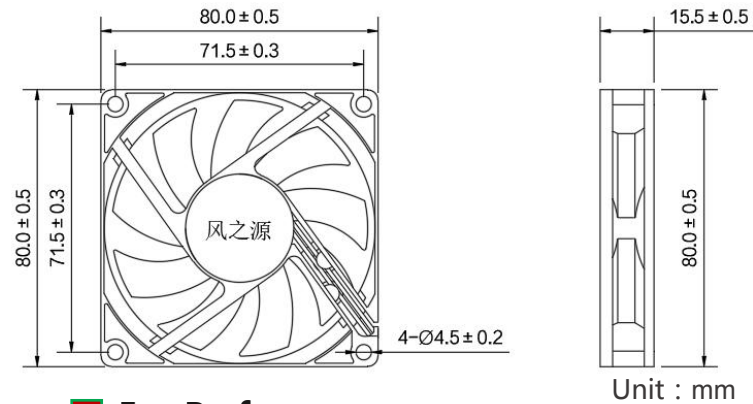

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)


Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD8015B4U-AP00	24	12~26.4	4000	0.18	4.32	40.23	68.35	4.68	0.18	43.20	●	40
FD8015B4H-AP00			3500	0.14	3.36	34.69	58.94	3.59	0.14	39.70	●	
FD8015B4M-AP00			3000	0.08	1.92	30.04	51.04	2.71	0.11	36.10	●	
FD8015B4L-AP00			2500	0.05	1.20	24.70	41.97	1.89	0.07	31.40	●	
FD8015B2U-AP00	12	6~14	4000	0.25	3.00	40.23	68.35	4.68	0.18	43.20	●	
FD8015B2H-AP00			3500	0.18	2.16	34.69	58.94	3.59	0.14	39.70	●	
FD8015B2M-AP00			3000	0.12	1.44	30.04	51.04	2.71	0.11	36.10	●	
FD8015B2L-AP00			2500	0.08	0.96	24.70	41.97	1.89	0.07	31.40	●	
FD8015B1U-AP00	5	3.5~5.5	4000	0.45	2.25	40.23	68.35	4.68	0.18	43.20	●	
FD8015B1H-AP00			3500	0.35	1.75	34.69	58.94	3.59	0.14	39.70	●	
FD8015B1M-AP00			3000	0.27	1.35	30.04	51.04	2.71	0.11	36.10	●	
FD8015B1L-AP00			2500	0.20	1.00	24.70	41.97	1.89	0.07	31.40	●	

Performance Curve

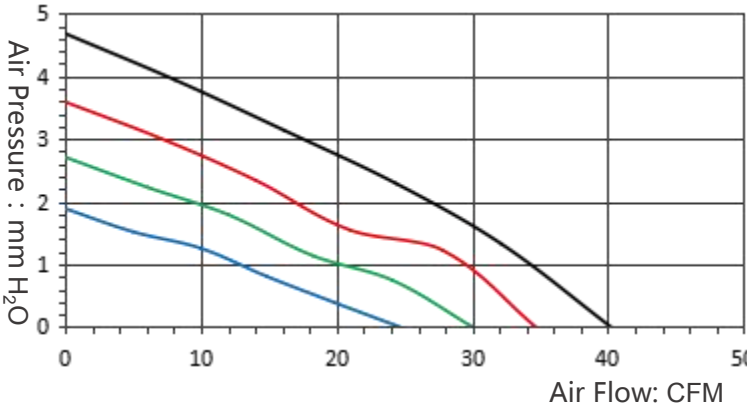

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Imperller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.