


FD9225 (92x92x25mm)


Product Image



Dimension Drawing

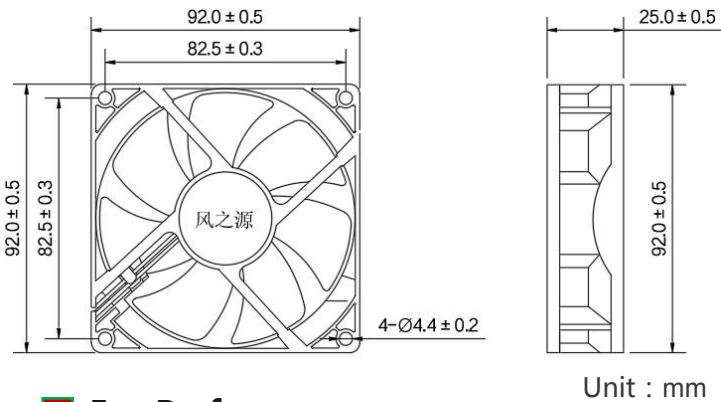

Performance Curve

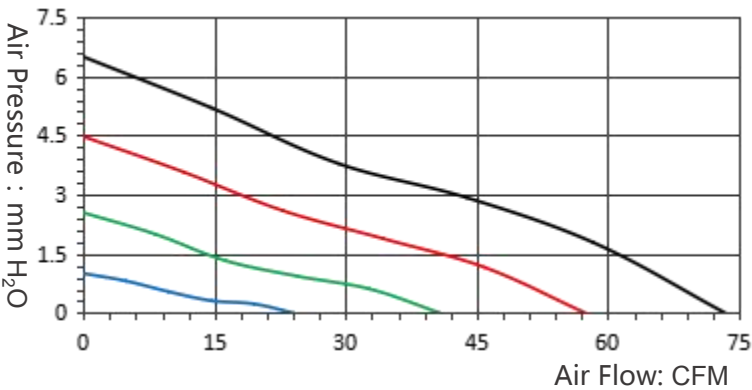

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG24 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending Machine , Stage lighting equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD9225B4U-AP00	24	12~26.4	4500	0.24	5.76	73.40	124.71	6.49	0.26	52.40	Black	
FD9225B4H-AP00			3500	0.18	4.32	57.40	97.52	4.47	0.18	44.30	Red	
FD9225B4M-AP00			2500	0.06	1.44	40.78	69.29	2.54	0.10	34.80	Green	
FD9225B4L-AP00			1500	0.03	0.72	24.03	40.83	1.00	0.04	25.60	Blue	
FD9225B2U-AP00	12	6~14	4500	0.45	5.40	73.40	124.71	6.49	0.26	52.40	Black	
FD9225B2H-AP00			3500	0.24	2.88	57.40	97.52	4.47	0.18	44.30	Red	
FD9225B2M-AP00			2500	0.15	1.80	40.78	69.29	2.54	0.10	34.80	Green	
FD9225B2L-AP00			1500	0.04	0.48	24.03	40.83	1.00	0.04	25.60	Blue	
FD9225B1U-AP00	5	3.5~5.5	4500	0.60	3.00	73.40	124.71	6.49	0.26	52.40	Black	
FD9225B1H-AP00			3500	0.45	2.25	57.40	97.52	4.47	0.18	44.30	Red	
FD9225B1M-AP00			2500	0.40	2.00	40.78	69.29	2.54	0.10	34.80	Green	
FD9225B1L-AP00			1500	0.30	1.50	24.03	40.83	1.00	0.04	25.60	Blue	