


FD1238 (120x120x38mm)


Product Image



Dimension Drawing

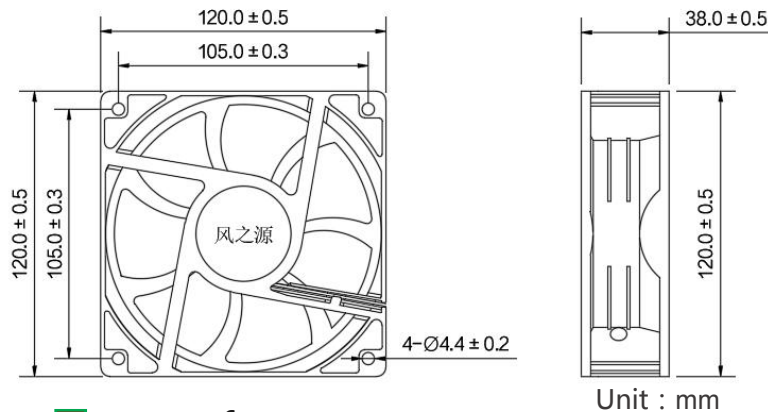

Performance Curve

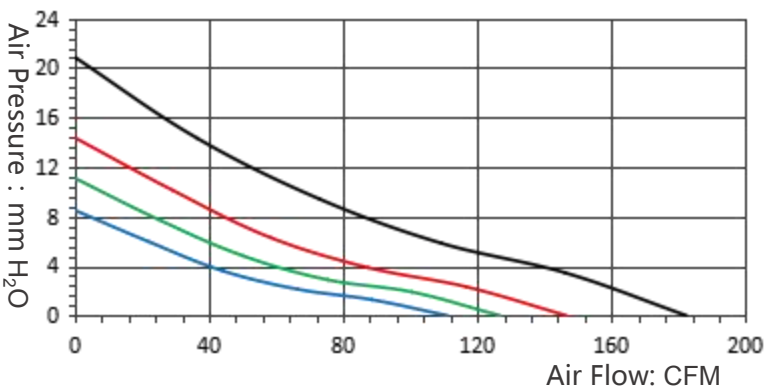

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1007 AWG22 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD1238B6U-AP00	48	43.6~52.8	5000	0.50	24.00	182.34	309.80	20.87	0.82	63.7	●	320
FD1238B6H-AP00			4000	0.40	19.20	146.56	249.01	14.37	0.57	55.5	●	
FD1238B6M-AP00			3500	0.30	14.40	126.70	215.26	11.10	0.44	50.4	●	
FD1238B6L-AP00			3000	0.20	9.60	111.06	188.69	8.51	0.34	46.1	●	
FD1238B4U-AP00	24	12~26.4	5000	0.80	19.20	182.34	309.80	20.87	0.82	63.7	●	
FD1238B4H-AP00			4000	0.50	12.00	146.56	249.01	14.37	0.57	55.5	●	
FD1238B4M-AP00			3500	0.40	9.60	126.70	215.26	11.10	0.44	50.4	●	
FD1238B4L-AP00			3000	0.30	7.20	111.06	188.69	8.51	0.34	46.1	●	
FD1238B2U-AP00	12	6~14	5000	1.00	12.00	182.34	309.80	20.87	0.82	63.7	●	
FD1238B2H-AP00			4000	0.70	8.40	146.56	249.01	14.37	0.57	55.5	●	
FD1238B2M-AP00			3500	0.50	6.00	126.70	215.26	11.10	0.44	50.4	●	
FD1238B2L-AP00			3000	0.40	4.80	111.06	188.69	8.51	0.34	46.1	●	