


FD4028 (40x40x28mm)


Product Image



Dimension Drawing

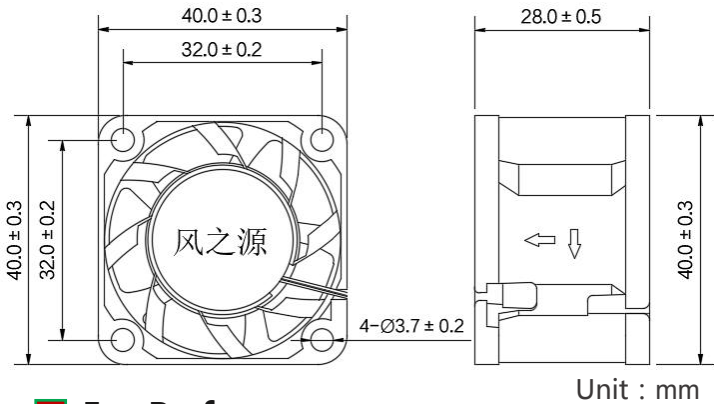

Performance Curve

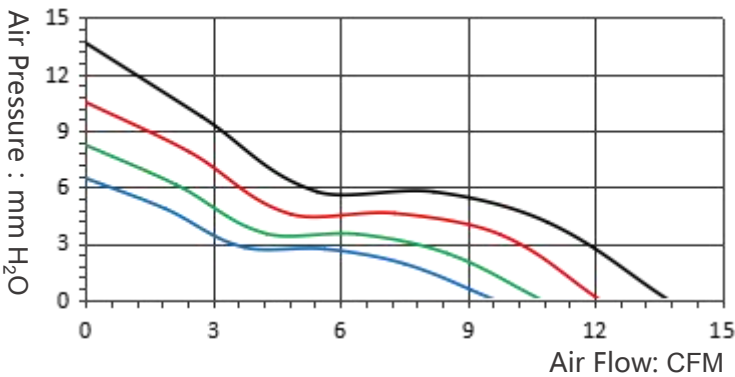

Fan Performance

Allowable Ambient : Working: -20°C ~ +80°C (Ball)
Temperature Range -10°C ~ +70°C (Hydraulic)
In stock : -40°C ~ +85°C (Ball)
-20°C~+75°C (Hydraulic)

Fan Material

Outer Frame : PBT Plastic (Black) UL94V-0
Impeller : PBT Plastic (Black) UL94V-0
Bearing System : Ball / Sleeve
Leading Wire : UL1571 AWG26 + : Red - : Black
* Other requirements please consult separately.

Life Expectancy

Life Expectancy : 40°C 50, 000 hours (Ball)
40°C 30, 000 hours (Hydraulic)

Industry Application

Apply to : Charger , Power Supply , Vending
Machine , Stage lighting
equipment and so on.

Specification

Model	Rated Voltage	Voltage Range	Speed	Current	Power	Air Flow		Pressure		Noise	Curve	Weight
	VDC	VDC	RPM	A	W	CFM	m³/h	mm H2O	In H2O	dBA	Color	g
FD4028B4U-AT00	24	12~26.4	10000	0.12	2.88	13.73	23.33	13.66	0.54	44.30	Black	32
FD4028B4H-AT00			9000	0.09	2.16	12.12	20.59	10.51	0.41	41.60	Red	
FD4028B4M-AT00			8000	0.06	1.44	10.74	18.25	8.23	0.32	38.50	Green	
FD4028B4L-AT00			7000	0.04	0.96	9.64	16.38	6.47	0.25	35.20	Blue	
FD4028B2U-AT00	12	6~14	10000	0.20	2.40	13.73	23.33	13.66	0.54	44.30	Black	
FD4028B2H-AT00			9000	0.16	1.92	12.12	20.59	10.51	0.41	41.60	Red	
FD4028B2M-AT00			8000	0.10	1.20	10.74	18.25	8.23	0.32	38.50	Green	
FD4028B2L-AT00			7000	0.07	0.84	9.64	16.38	6.47	0.25	35.20	Blue	

Operation direction: Clockwise as observed from the label.
※ The above specifications are for reference and the final specifications are subject to change.